



**CENTRE OF TESTING SERVICE  
INTERNATIONAL**

**OPERATE ACCORDING TO ISO/IEC 17025**

# **LVD TEST REPORT**

**TEST REPORT NUMBER : CTS190809039-L**



**CENTRE OF TESTING SERVICE CO., LTD.**

**F1.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China**



Report No.: CTS190809039-L	Page 1 of 126	Date: 10 September 2019
----------------------------	---------------	-------------------------

## Table of contents

<b>1.</b>	<b>General Information</b>	<b>2</b>
1.1	Notes	2
1.2	Tester	3
1.3	Testing laboratory	4
1.4	Application details	4
1.5	Test item description	5
1.6	Test standards	6
<b>2.</b>	<b>Technical test</b>	<b>7</b>
2.1	Summary of test results	7
2.2	Test environment	7
2.3	Conformity verification - Summary of inspection	8
<b>3.</b>	<b>Test Results</b>	<b>9</b>
3.1	Particulars: test item vs. test requirements	9
3.2	General requirements and results	11
3.3	Annex as stated in the standards	56
3.4	Tables	103
3.5	Appendix	114
	<b>Attachments</b>	<b>128</b>



Report No.: CTS190809039-L	Page 2 of 126	Date: 10 September 2019
----------------------------	---------------	-------------------------

## 1 General Information

### 1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has Passed all the relevant tests conforms to a specification (only telecommunication products).

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Centre of Testing Service.




# CTS

CENTRE OF TESTING SERVICE


Report No.: CTS190809039-L	Page 3 of 126	Date: 10 September 2019
----------------------------	---------------	-------------------------

## 1.2 Tester


### Tested by:

10 September 2019	Jesse Huang	
Date	Name	Signature

### Reviewed by:

10 September 2019	Rock weng	
Date	Name	Signature

### Approved by:

10 September 2019	Lei Zhang	
Date	Name	Signature



Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

#### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Complaint line: +86-574-87908003

Fax: +86-574-87907993

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 4 of 126	Date: 10 September 2019
----------------------------	---------------	-------------------------

## 1.3 Testing laboratory

### 1.3.1 Location

Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Telephone: + 86-574-87912121

Telfax: + 86-574-87907993

### 1.3.2 Test location, where different from CTS:

Name: ./.

Street: ./.

Town: ./.

Country: ./.

Telephone: ./.

Fax: ./.

Teletex: ./.

## 1.4 Application details

### 1.4.1 Details of applicant

Name :

Street :

Town :

Country :

Telephone :

Fax :

Teletex :

Contact :

Telephone :



Report No.: CTS190809039-L	Page 5 of 126	Date: 10 September 2019
----------------------------	---------------	-------------------------

## 1.4.2 Details of wanted approval holder

Name :  
Street :  
Town :  
Country :  
Telephone :  
Fax :  
Teletex :  
  
Contact :  
Telephone :

## 1.4.3 Manufacturer

Name :  
Street :  
  
Town :  
Country :

## 1.4.4 Dates of application

Date of receipt of application : 09 August 2019  
Date of receipt of test item : 09 August 2019  
Date of test : 09 August 2019—10 September 2019



Report No.: CTS190809039-L	Page 6 of 126	Date: 10 September 2019
----------------------------	---------------	-------------------------

## 1.5 Test item Description

### 1.5.1 Description of test item

Type of product : Appliances for heating liquids

Model/Type reference : EB-FD50F1

Serial number : ---

### 1.5.2 Test item particulars

Test item .....	RICE COOKER
Trade Mark .....	---
Manufacture .....	
Appliance Mobility .....	<input checked="" type="checkbox"/> Portable Appliance; <input type="checkbox"/> Hand-held Appliance; <input type="checkbox"/> Stationary Appliance; <input type="checkbox"/> Fixed Appliance; <input type="checkbox"/> Built-in Appliance
Protection Class .....	<input type="checkbox"/> Class 0; <input checked="" type="checkbox"/> Class I; <input type="checkbox"/> Class 0I; <input type="checkbox"/> Class II; <input type="checkbox"/> Class III;
Rated Voltage(Range).....	220-240V~
Rated Frequency .....	<input type="checkbox"/> 50Hz; <input type="checkbox"/> 60Hz; <input checked="" type="checkbox"/> 50/60Hz; <input type="checkbox"/> DC; <input type="checkbox"/> Other:
Rated Power(Current) .....	860-1020W
Degree of Protection .....	<input checked="" type="checkbox"/> IP20; <input type="checkbox"/> IP24; <input type="checkbox"/> Other:
Supply Connection .....	<input type="checkbox"/> Type X; <input checked="" type="checkbox"/> Type Y; <input type="checkbox"/> Type Z; <input type="checkbox"/> Pins; <input checked="" type="checkbox"/> Appliance inlet; <input type="checkbox"/> Permanently connected to fixed wiring; <input type="checkbox"/> Other:
Mass of Equipment.....	3,74 kg
Instructions language .....	<input checked="" type="checkbox"/> English; <input type="checkbox"/> French; <input type="checkbox"/> Other:

(all informations was provided by the applicant or detected at the sample)  
Please see also attachment



## 1.6 Test standards

**EN 60335-1: 2012+A11:2014+A13:2017**  
Household and similar electrical appliances - Safety -  
Part 1: General requirements

**EN 60335-2-15: 2016+A11:2018**  
Household and similar electrical appliances - Safety -  
Part 2-15: Particular requirements for appliances for heating liquids

## 2 Technical test

### 2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



### 2.2 Test environment

Temperature: 18 ... 25 °C  
Relative humidity content: 20 ... 75 %  
Air pressure: 860 ... 1030 h Pa  
Details of power supply: 20 ... 280 V, AC  
Other parameters: ---





Report No.: CTS190809039-L	Page 8 of 126	Date: 10 September 2019
----------------------------	---------------	-------------------------

## 2.3 Conformity verification - Summary of inspection

Clause	Summary of inspection	Test result		
		N.A.	Pass	Fail
6	Classification	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
7	Marking and instructions	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
8	Protection against access to life parts	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
9	Starting of motor-operated appliances	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
10	Power input and current	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
11	Heating	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
12	Void			
13	Leakage current and electric strength at operating temperature	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
14	Transient overvoltages	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15	Moisture resistance	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
16	Leakage current and electrical strength	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
17	Overload protection of transformers and associated circuits	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
18	Endurance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
19	Abnormal operation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
20	Stability and mechanical hazards	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
21	Mechanical strength	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
22	Construction	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
23	Internal wiring	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
24	Components	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
25	Supply connection and external flexible cords	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
26	Terminals for external conductors	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
27	Provision for earthing	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
28	Screws and connections	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
29	Clearances, creepage distances and solid insulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
30	Resistance to heat and fire	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
31	Resistance to rusting	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
32	Radiation, toxicity and similar hazards	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Annexes		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

### Test case verdicts

N.A.: Test case does not apply to the test object

Pass: Test item does meet the requirement

Fail: Test item does not meet the requirement



### 3 Test results basic standard(s)

#### 3.1 Particulars: test item vs. Test requirements

<b>EN 60335-2-15</b> <b>Safety of household and similar electrical appliances</b> <b>Part II : Particular requirements for appliances for heating liquids</b>	
<b>Possible test case verdicts:</b> - test case does not apply to the test object.. : N(N/A) - test object does meet the requirement ..... : P(Pass) - test object does not meet the requirement . : F(Fail)	
<b>Test specification:</b> Standard ..... : <div style="text-align: right;"><input checked="" type="checkbox"/> EN 60335-2-15: 2016+A11:2018 used in conjunction with EN 60335-1: 2012+A11:2014+A13:2017</div> Test procedure ..... : LVD DOC approval. Non-standard test method ..... : N/A	
<b>Test Report Form No</b> ..... : IEC 60335_2_15A <b>Test Report Form(s) Originator</b> ... : Centre of Testing Service <b>Master TRF</b> ..... : Dated May 2019 <b>Copyright blank test report</b> Centre of Testing Service	

**General remarks:**


“(see remark #)” refers to a remark appended to the report.

“(see appended table)” refers to a table appended to the report.

Throughout this report a comma is used as the decimal separator.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced except in full without the written approval of the testing laboratory.

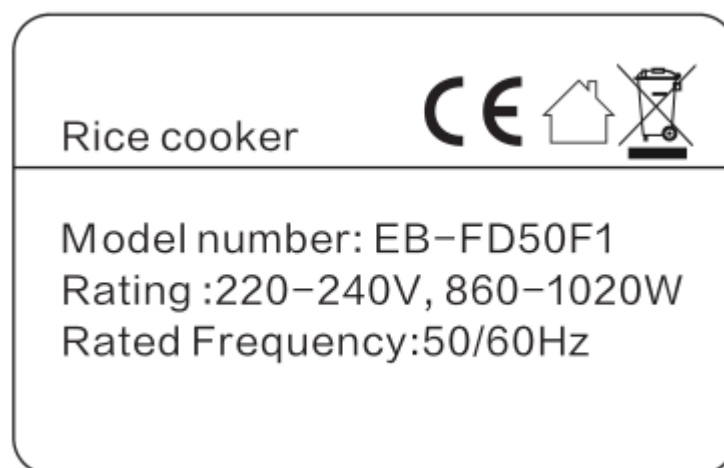**Copy of marking plate:**



Report No.: CTS190809039-L	Page 11 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

## 3.2 General requirements and results

	IEC 60335-2-15		
5	GENERAL CONDITIONS FOR THE TESTS		P
	Tests performed according to clause 5, e.g. nature of supply, sequence of testing, etc.		P
5.2	If the test of 15.101 has to be carried out, three additional samples are required (IEC 60335-2-15)		N
5.3	Test of 19.101, carried out after the other tests (IEC 60335-2-15)		N
5.101	Induction rice cookers tested as motor-operated appliances (IEC 60335-2-15)		N
6	CLASSIFICATION		P
6.1	Protection against electric shock: Class 0, 0I, I, II, III :	Class I appliance	P
6.2	Protection against harmful ingress of water	IP20	N
	Wash boilers and livestock feed boilers at least IPX3 (IEC 60335-2-15)		N
7	MARKING AND INSTRUCTIONS		P
7.1	Rated voltage or voltage range (V) :	220-240V	P
	Symbol for nature of supply, or :	~	P
	Rated frequency (Hz) :	50/60	P
	Rated power input (W), or :	860-1020W	P
	Rated current (A) :		N
	Manufacturer's or responsible vendor's name, trademark or identification mark :		P
	Model or type reference :	EB-FD50F1	P
	Symbol IEC 60417-5172, for class II appliances	class I appliance	N
	IP number, other than IPX0 :	IPX0	N
	Symbol IEC 60417-5180, for class III appliances, unless	class I appliance	N
	the appliance is operated by batteries only	Not operated by batteries only	N



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 12 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Symbol IEC 60417-5018, for class II and class III appliances incorporating a functional earth	Not incorporating a functional earth	N
	Symbol IEC 60417-5036, for the enclosure of electrically-operated water valves in external hose-sets for connection of an appliance to the water mains, if the working voltage exceeds extra-low voltage		N
	Appliances intended to be partially immersed in water for cleaning, marked with the maximum level of immersion, (IEC 60335-2-15)	Not intended to be partially immersed in water for cleaning	N
	And with the substance of the following: "Do not immerse beyond this level" (IEC 60335-2-15)		N
	For kettles: level mark or other means which indicate the rated capacity (IEC 60335-2-15)	Not kettle	N
	Unless they cannot be filled beyond their rated capacity (IEC 60335-2-15)		N
	Indication visible whit kettle in filling position (IEC 60335-2-15)		N
	Reference to the level mark on the outside of the kettle, if the level is not self-evident (IEC 60335-2-15)		N
	Marking on the appliance of the closed position of the lid of pressure cooker, if it is not obvious (IEC 60335-2-15)		N
	Identification mark and model or type reference of stand for cordless kettles (IEC 60335-2-15)		N
	Soy milk makers: level mark or other means to indicate when they are filled to rated capacity (IEC 60335-2-15)		N
	Unless they cannot be filled beyond their rated capacity (IEC 60335-2-15)		N
7.2	Warning for stationary appliances for multiple supply		N
	Warning placed in vicinity of terminal cover		N
7.3	Range of rated values marked with the lower and upper limits separated by a hyphen	220-240	P
	Different rated values marked with the values separated by an oblique stroke	50/60	P
7.4	Appliances adjustable for different rated voltages or rated frequencies, the voltage or the frequency setting is clearly discernible		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 13 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Requirement met if frequent changes are not required and the rated voltage or rated frequency to which the appliance is to be adjusted is determined from a wiring diagram		N
7.5	Appliances with more than one rated voltage or one or more rated voltage ranges, marked with rated input or rated current for each rated voltage or range, unless		P
	the power input or current are related to the arithmetic mean value of the rated voltage range		N
	Relation between marking for upper and lower limits of rated power input or rated current and voltage is clear	860-1020W	P
7.6	Correct symbols used		P
	Symbol for nature of supply placed next to rated voltage		P
	Symbol for class II appliances placed unlikely to be confused with other marking		N
	Units of physical quantities and their symbols according to international standardized system		P
7.7	Connection diagram fixed to appliances to be connected to more than two supply conductors and appliances for multiple supply, unless		N
	correct mode of connection is obvious		N
7.8	Except for type Z attachment, terminals for connection to the supply mains indicated as follows:		P
	- marking of terminals exclusively for the neutral conductor (letter N)		P
	- marking of protective earthing terminals (symbol IEC 60417-5019)		P
	- marking of functional earthing terminals (symbol IEC 60417-5018)		N
	- marking not placed on removable parts		P
7.9	Marking or placing of switches which may cause a hazard		N
7.10	Indications of switches on stationary appliances and controls on all appliances by use of figures, letters or other visual means :		N
	This applies also to switches which are part of a control		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 14 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	If figures are used, the off position indicated by the figure 0		N
	The figure 0 indicates only OFF position, unless no confusion with the OFF position		N
7.11	Indication for direction of adjustment of controls		N
7.12	Instructions for safe use provided		P
	Details concerning precautions during user maintenance		P
	The instructions state that:		P
	- the appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction		P
	- children being supervised not to play with the appliance		P
	For a part of class III construction supplied from a detachable power supply unit, the instructions state that the appliance is only to be used with the unit provided		N
	Instructions for class III appliances state that it must only be supplied at SELV, unless		N
	it is a battery-operated appliance, the battery being charged outside the appliance		N
	For appliances for altitudes exceeding 2000 m, the maximum altitude is stated :		N
	The instructions for appliances incorporating a functional earth states that the appliance incorporates an earth connection for functional purposes only		N
	The instructions for appliances include the substance of the following: (IEC 60335-2-15)		P
	This appliance is intended to be used in household and similar applications such as: (IEC 60335-2-15)		P
	- staff kitchen areas in shops, offices and other working environments;		P
	- farm houses;		P
	- by clients in hotels, motels and other residential type environments;		P

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 15 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	- bed and breakfast type environments.		P
	If the manufacturer wants to limit the use of the appliance to less than the above, this is clearly stated in the instructions (IEC 60335-2-15)		N
	Appliance incorporating an appliance inlet and intended to be immersed for cleaning, instructions include the following : (IEC 60335-2-15)		N
	- the connector must be remove before cleaning		N
	- the appliance inlet must be dried before the appliance is used again		N
	The instructions for appliances normally cleaned after use and not intended to be immersed in water for cleaning, state that the appliance must not be immersed (IEC 60335-2-15)	must not be immersed	P
	This requirement normally applies to coffee-makers, cooking pans, milk heaters, pressure cookers, steam cookers, slow cookers, soy milk makers and yoghurt makers (IEC 60335-2-15)		P
	The instructions for use for appliances intended to be used with a connector incorporating a thermostat, state that only the appropriate connector must be used (IEC 60335-2-15)		N
	Unless, kettles are constructed so that a hazard cannot arise from boiling water being ejected, the instructions for use include the following: (IEC 60335-2-15)		N
	- if the kettle is overfilled, boiling water may be ejected		N
	The instructions for use for kettles filled through a lid aperture which is situated below the handle, include the substance of the following: (IEC 60335-2-15)		N
	- WARNING: "Do not remove the lid while the water is boiling"		N
	- WARNING: "Position the lid so that steam is directed away from the handle"		N
	The caution statement is not required if the lid can only be closed so that steam is directed away from the handle (IEC 60335-2-15)		N
	The instructions for cordless appliances state that the appliance is only to be used with the stand provided (IEC 60335-2-15)		N
	If the appliance and stand of cordless appliances can be lifted together by gripping the handle of the appliance, the instructions include the substance of the following: (IEC 60335-2-15)		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service





# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 16 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	- CAUTION: Insure that the appliance is switched off before removing it from its stand.		N
	Instructions for feeding bottle heaters: (IEC 60335-2-15)		N
	- state that the food should not be heated for too long a period		N
	- state how to check that the correct food temperature has not been exceeded		N
	Instructions for pressure cookers, other than dynamic pressure cookers: (IEC 60335-2-15)		N
	- state that the ducts in the pressure regulator allowing the escape of steam should be checked regularly to ensure that they are not blocked		N
	Instructions for pressure cookers: (IEC 60335-2-15)		N
	- give details of how to open the container safely		N
	- and state that the container must not be opened until the pressure has decreased sufficiently		N
	The instructions for use for egg boilers provided with a pricking device contain the substance of the following : (IEC 60335-2-15)		N
	- CAUTION: "Avoid injuries from the egg pricking device"		N
	Instructions for espresso coffee-makers incorporating a pressurized reservoir filled by the user: (IEC 60335-2-15)		N
	- contain information for the safe refilling of the water reservoir and the substance of the following:		N
	- WARNING: The filling aperture must not be opened during use		N
	The instructions for all appliances include: (IEC 60335-2-15)		N
	- a warning to avoid spillage on the connector		N
	- details on how to clean the surfaces in contact with food		N
	- a warning of potential injury from misuse		N
	- a statement that the heating element surface is subject to residual heat after use		N
	The instructions for soy milk makers also include a statement that care shall be taken when handling the sharp cutting blades, emptying the container and during cleaning (IEC 60335-2-15)		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 17 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	The instruction for soy milk makers incorporating a switch necessary for compliance with 22.40 include the substance of the following: (IEC 60335-2-15)		N
	- Switch off the appliance and disconnect from supply before changing accessories or approaching parts that move in use		N
7.12.1	Sufficient details for installation supplied		P
	For an appliance intended to be permanently connected to the water mains and not connected by a hose-set, this is stated		N
	If different rated voltages or different rated frequencies are marked, the instructions state what action to be taken to adjust the appliance		N
7.12.2	Stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III, the instructions state that means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules		N
7.12.3	Insulation of the fixed wiring in contact with parts exceeding 50 K during clause 11; instructions state that the fixed wiring must be protected		N
7.12.4	Instructions for built-in appliances:		N
	- dimensions of space		N
	- dimensions and position of supporting and fixing		N
	- minimum distances between parts and surrounding structure		N
	- minimum dimensions of ventilating openings and arrangement		N
	- connection to supply mains and interconnection of separate components		N
	- allow disconnection of the appliance after installation, by accessible plug or a switch in the fixed wiring, unless		N
	a switch complying with 24.3		N
7.12.5	Replacement cord instructions, type X attachment with a specially prepared cord		N
	Replacement cord instructions, type Y attachment	type Y attachment	P

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 18 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Replacement cord instructions, type Z attachment		N
7.12.6	Caution in the instructions for appliances incorporating a non-self-resetting thermal cut-out that is reset by disconnection of the supply mains, if this cut-out is required to comply with the standard		N
7.12.7	Instructions for fixed appliances stating how the appliance is to be fixed		N
7.12.8	Instructions for appliances connected to the water mains:		N
	- max. inlet water pressure (Pa) :		N
	- min. inlet water pressure, if necessary (Pa) :		N
	Instructions concerning new and old hose-sets for appliances connected to the water mains by detachable hose-sets		N
7.13	Instructions and other texts in an official language		P
7.14	Marking clearly legible and durable, rubbing test as specified		P
7.15	Markings on a main part		P
	Marking clearly discernible from the outside, if necessary after removal of a cover		P
	For portable appliances, cover can be removed or opened without a tool		P
	For stationary appliances, name, trademark or identification mark and model or type reference visible after installation		N
	For fixed appliances, name, trademark or identification mark and model or type reference visible after installation according to the instructions		N
	Indications for switches and controls placed on or near the components. Marking not on parts which can be positioned or repositioned in such a way that the marking is misleading		N
	The symbol IEC 60417-5018 placed next to the symbol IEC 60417-5172 or IEC 60417-5180		N
7.16	Marking of a possible replaceable thermal link or fuse link clearly visible with regard to replacing the link		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 19 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

8	PROTECTION AGAINST ACCESS TO LIVE PARTS	P
8.1	Adequate protection against accidental contact with live parts	P
8.1.1	Requirement applies for all positions, detachable parts removed	P
	Lamps behind a detachable cover not removed, if conditions met	N
	Insertion or removal of lamps, protection against contact with live parts of the lamp cap	N
	Use of test probe B of IEC 61032, with a force not exceeding 1 N: no contact with live parts	P
	Use of test probe B of IEC 61032 through openings, with a force of 20N: no contact with live parts	P
8.1.2	Use of test probe 13 of IEC 61032, with a force not exceeding 1 N, through openings in class 0 appliances and class II appliances/constructions: no contact with live parts	P
	Test probe 13 also applied through openings in earthed metal enclosures having a non-conductive coating: no contact with live parts	P
	See Note 101 (IEC 60335-2-15)	P
8.1.3	For appliances other than class II, use of test probe 41 of IEC 61032, with a force not exceeding 1 N: no contact with live parts of visible glowing heating elements	N
8.1.4	Accessible part not considered live if:	N
	- safety extra-low a.c. voltage: peak value not exceeding 42.4 V	N
	- safety extra-low d.c. voltage: not exceeding 42.4 V	N
	- or separated from live parts by protective impedance	N
	If protective impedance: d.c. current not exceeding 2 mA, and	N
	a.c. peak value not exceeding 0.7 mA	N
	- for peak values over 42.4 V up to and including 450 V, capacitance not exceeding 0,1 $\mu$ F	N
	- for peak values over 450 V up to and including 15 kV, discharge not exceeding 45 $\mu$ C	N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

**Centre of Testing Service**

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 20 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	- for peak values over 15kV, the energy in the discharge not exceeding 350 mJ		N
8.1.5	Live parts protected at least by basic insulation before installation or assembly:		P
	- built-in appliances		N
	- fixed appliances		N
	- appliances delivered in separate units		N
8.2	Class II appliances and constructions constructed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only	Class II constructions	P
	Only possible to touch parts separated from live parts by double or reinforced insulation		P
9	STARTING OF MOTOR-OPERATED APPLIANCES		N
	Requirements and tests are specified in part 2 when necessary		N
10	POWER INPUT AND CURRENT		P
10.1	Power input at normal operating temperature, rated voltage and normal operation not deviating from rated power input by more than shown in table 1 :	(see appended table)	P
	If the power input varies throughout the operating cycle and the maximum value of the power input exceeds, by a factor greater than two, the arithmetic mean value of the power input occurring during a representative period, the power input is the maximum value that is exceeded for more than 10 % of the representative period		N
	Otherwise the power input is the arithmetic mean value		N
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		P
	the rated power input is related to the arithmetic mean value		N
10.2	Current at normal operating temperature, rated voltage and normal operation not deviating from rated current by more than shown in table 2 :	(see appended table)	N



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 21 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	If the current varies throughout the operating cycle and the maximum value of the current exceeds, by a factor greater than two, the arithmetic mean value of the current occurring during a representative period, the current is the maximum value that is exceeded for more than 10 % of the representative period		N
	Otherwise the current is the arithmetic mean value		N
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N
	the rated current is related to the arithmetic mean value of the range		N
11	HEATING		P
11.1	No excessive temperatures in normal use		P
11.2	The appliance is held, placed or fixed in position as described :		P
	Portable appliances tested away from the walls of the test corner (IEC 60335-2-15)		P
11.3	Temperature rises, other than of windings, determined by thermocouples		P
	Temperature rises of windings determined by resistance method, unless		N
	the windings are non-uniform or it is difficult to make the necessary connections		N
	See Note 101 (IEC 60335-2-15)		N
11.4	Heating appliances operated under normal operation at 1.15 times rated power input (W) :	1,15P <sub>n</sub>	P
	If the temperature rise limits are exceeded in appliances incorporating motors, transformers or electronic circuits and if the power input is lower than the rated power input, test repeated with the appliance supplied at 1,06 times rated voltage (IEC 60335-2-15)		N
11.5	Motor-operated appliances operated under normal operation at most unfavourable voltage between 0.94 and 1.06 times rated voltage (V) :		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 22 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

11.6	Combined appliances operated under normal operation at most unfavourable voltage between 0.94 and 1.06 times rated voltage (V) :		N
	Combined appliances tested as heating appliances (IEC 60335-2-15)		N
11.7	Appliances operated for the duration specified in 11.7.101 to 11.7.106 (IEC 60335-2-15)		P
11.7.101	For kettles with temperature limiter: test terminated after second operation of temperature limiter (IEC 60335-2-15)		N
	For kettles with thermostat: test terminated 15 min after the water has attained 95 °C		N
	For other kettles: test terminated 5 min after the water has attained 95 °C		N
11.7.102	For cooking pans, egg boilers, feeding-bottle heaters, glue pots, livestock feed boilers, milk heaters, sterilizers, wash boilers and for appliances that boil water other than kettles, the test is terminated: (IEC 60335-2-15)		N
	- appliances without a thermal control: 15 min after the water in the container has attained a temperature of 95 °C or the maximum temperature it can attain if this is lower		N
	- portable appliances provided with a thermal control: 15 min after the thermal control has operated for the first time		N
	- fixed appliances provided with a thermal control: 30 min after the thermal control has operated for the first time		N
	- appliances with acoustic signal: 1 min after signal		N
	- egg boilers having provision for keeping eggs warm, and appliances having a heated surface intended to keep liquid warm: when steady conditions are established		N
11.7.103	Slow cookers, rice cookers, steam cookers and yoghurt makers operated until steady conditions are established (IEC 60335-2-15)	rice cookers : steady conditions are established	P
	Slow cookers pre-warmed in the dry state if this instruction is given		N
11.7.104	Espresso coffee-makers operated in accordance with the instructions for use (IEC 60335-2-15)		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 23 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Automatic espresso coffee makers and espresso coffee makers, the brewing period is the time necessary to produce the maximum quantity of coffee allowed by the timer or by the capacity of the coffee pot		N
	Manual espresso coffee makers, maximum quantity of coffee to be produced specified in the instructions, or		N
	the brewing period is the time necessary to produce 100 ml of coffee for each cycle		N
	Espresso coffee-makers having an outlet for supplying steam or hot water, the brewing period is immediately followed by a period during which the steam or water is supplied for the time stated in the instructions, or		N
	- espresso coffee makers having an outlet for supplying steam, 1 min.		N
	- espresso coffee makers having an outlet for supplying water, the time necessary to produce 100 ml of water		N
	Espresso coffee-makers operated until steady conditions are established		N
	Other coffee-makers operated for the time necessary to make the maximum quantity of coffee stated in the instructions		N
	The container refilled as quickly as possible and the coffee-maker operated again until steady conditions are established		N
11.7.105	Pressure cookers operated 15 min after attaining the maximum cooking pressure (IEC 60335-2-15)		N
11.7.106	Soy milk makers operated for a complete operating cycle (IEC 60335-2-15)		N
11.8	Temperature rises monitored continuously and not exceeding the values in table 3 :	(see appended table)	P
	If the temperature rise of a motor winding exceeds the value of table 3, or		N
	if there is doubt with regard to classification of insulation,		N
	tests of Annex C are carried out		N
	Sealing compound does not flow out		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service





# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 24 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Protective devices do not operate, except		P
	components in protective electronic circuits tested for the number of cycles specified in 24.1.4		N
	When an appliance connector incorporates a thermostat, the temperature rise limit for the pins of the inlet does not apply (IEC 60335-2-15)		N
	The temperature rise limits of motors, transformers, components of electronic circuit and parts directly influenced by them may be exceeded when the appliance is operated at 1,15 times rated power input (IEC 60335-2-15)		N
13	LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE		P
13.1	Leakage current not excessive and electric strength adequate		P
	Heating appliances operated at 1.15 times the rated power input (W) :		P
	Motor-operated appliances and combined appliances supplied at 1.06 times the rated voltage (V) :		N
	Protective impedance and radio interference filters disconnected before carrying out the tests		N
13.2	For class 0, class II and class III appliances, and class II constructions, leakage current measured by means of the circuit described in figure 4 of IEC 60990	Class II constructions	P
	For class 0I and class I appliances, a low impedance ammeter may be used	class I appliances	P
	Leakage current measurements :	(see appended table)	P
13.3	The appliance is disconnected from the supply		P
	Electric strength tests according to table 4 :	(see appended table)	P
	No breakdown during the tests		P
14	TRANSIENT OVERVOLTAGES		---
	Appliances withstand the transient over-voltages to which they may be subjected		---
	Clearances having a value less than specified in table 16 subjected to an impulse voltage test, the test voltage specified in table 6 :	(see appended table)	---

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 25 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	No flashover during the test, unless		---
	of functional insulation if the appliance complies with clause 19 with the clearance short-circuited		---
15	MOISTURE RESISTANCE		P
15.1	Enclosure provides the degree of moisture protection according to classification of the appliance	IP20	P
	Compliance checked as specified in 15.1.1, taking into account 15.1.2, followed by the electric strength test of 16.3		N
	No trace of water on insulation which can result in a reduction of clearances or creepage distances below values specified in clause 29		N
15.1.1	Appliances, other than IPX0, subjected to tests as specified in IEC 60529 :	IPX0	N
	Water valves containing live parts in external hoses for connection of an appliance to the water mains tested as specified for IPX7 appliances		N
15.1.2	Hand-held appliance turned continuously through the most unfavourable positions during the test		N
	Built-in appliances installed according to the instructions		N
	Appliances placed or used on the floor or table placed on a horizontal unperforated support		N
	Appliances normally fixed to a wall and appliances with pins for insertion into socket-outlets are mounted on a wooden board		N
	For IPX3 appliances, the base of wall mounted appliances is placed at the same level as the pivot axis of the oscillating tube		N
	For IPX4 appliances, the horizontal centre line of the appliance is aligned with the pivot axis of the oscillating tube, and		N
	for appliances normally used on the floor or table, the movement is limited to two times 90° for a period of 5 min, the support being placed at the level of the pivot axis of the oscillating tube		N
	Wall-mounted appliances, take into account the distance to the floor stated in the instructions		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 26 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Appliances normally fixed to a ceiling are mounted underneath a horizontal unperforated support, the pivot axis of the oscillating tube located at the level of the underside of the support, and		N
	for IPX4 appliances, the movement of the tube is limited to two times 90° from the vertical for a period of 5 min		N
	Appliances with type X attachment fitted with a flexible cord as described		N
	Detachable parts subjected to the relevant treatment with the main part		N
	However, if a part has to be removed for user maintenance and a tool is needed, this part is not removed		N
15.2	Spillage of liquid does not affect the electrical insulation		P
	Spillage solution comprising water containing approximately 1 % NaCl and 0,6 % rinsing agent		P
	Appliances with type X attachment fitted with a flexible cord as described		N
	Appliances incorporating an appliance inlet tested with or without an connector, whichever is most unfavourable		P
	The test is only carried out with the appliance connector in position (IEC 60335-2-15)		P
	For cordless appliances, the test with the appliance on the horizontal plane carried out with the appliance both on and off its stand (IEC 60335-2-15)		N
	For rice cookers, the test carried out with the rice container in place (IEC 60335-2-15)	rice cookers	P
	In case of doubt, spillage tests carried out with the appliance deviating from the normal position by an angle not exceeding 5° (IEC 60335-2-15)		P
	Detachable parts are removed		P
	Overfilling test with additional amount of the solution, over a period of 1 min (l) :	0,72L	P
	The appliance withstands the electric strength test of 16.3		P

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 27 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	No trace of water on insulation that can result in a reduction of clearances or creepage distances below values specified in clause 29		P
	Kettles that can be filled through the spout: additional overfilling test in conditions as specified (IEC 60335-2-15)		N
	For cordless kettles, the additional test carried out only with the cordless kettle off its stand, the kettle being replaced on its stand in order to carry out the electric strength test of 16.3 (IEC 60335-2-15)		N
	Coffee makers provided with a removable coffee pot: particular overfilling test in conditions as specified (IEC 60335-2-15)		N
	Steam sterilizers: particular overfilling test in conditions as specified (IEC 60335-2-15)		N
15.3	Appliances proof against humid conditions		P
	Checked by test Cab: Damp heat steady state in IEC 60068-2-78		P
	Detachable parts removed and subjected, if necessary, to the humidity test with the main part		P
	Humidity test for 48 h in a humidity cabinet	25°C, 93%RH	P
	Reassembly of those parts that may have been removed		P
	The appliance withstands the tests of clause 16		P
15.101	Appliances to be partially or completely immersed in water for cleaning sufficiently protected against effects of immersion (IEC 60335-2-15)		N
	Compliance is checked by the tests as specified, which are carried out on three additional appliances		N
	No trace of water on insulation which can result in reduction of creepage distances and clearance below values specified in 29		N
15.102	Connecting device of stands for cordless kettles not affected by water : particular electric strength test in conditions as specified (IEC 60335-2-15)		N
	Compliance is checked by the test in conditions as specified		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 28 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Stand withstanding the test of 16.3 with voltage reduced to 2500 V for reinforced insulation		N
15.103	Interior of rice cookers not affected by water (IEC 60335-2-15)		P
	Compliance is checked by the test as specified		P
	Rice cookers withstanding the electric strength test of 16.3		P
16	LEAKAGE CURRENT AND ELECTRIC STRENGTH		P
16.1	Leakage current not excessive and electric strength adequate		P
	Protective impedance disconnected from live parts before carrying out the tests		N
	Tests carried out at room temperature and not connected to the supply		P
16.2	Single-phase appliances: test voltage 1.06 times rated voltage (V) :	test voltage 1.06 times rated voltage	P
	Three-phase appliances: test voltage 1.06 times rated voltage divided by $\sqrt{3}$ (V) :		N
	Leakage current measurements :	(see appended table)	P
	Limit values doubled if:		N
	- all controls have an off position in all poles, or		N
	- the appliance has no control other than a thermal cut-out, or		N
	- all thermostats, temperature limiters and energy regulators do not have an off position, or		N
	- the appliance has radio interference filters		N
	With the radio interference filters disconnected, the leakage current do not exceed limits specified :	(see appended table)	N
16.3	Electric strength tests according to table 7 :	(see appended table)	P
	Test voltage applied between the supply cord and inlet bushing and cord guard and cord anchorage as specified :	(see appended table)	P
	No breakdown during the tests		P
17	OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 29 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	No excessive temperatures in transformer or associated circuits in event of short-circuits likely to occur in normal use :	(see appended table)	N
	Appliance supplied with 1.06 or 0.94 times rated voltage under the most unfavourable short-circuit or overload likely to occur in normal use (V) :		N
	Basic insulation is not short-circuited		N
	Temperature rise of insulation of the conductors of safety extra-low voltage circuits not exceeding the relevant value specified in table 3 by more than 15 K		N
	Temperature of the winding not exceeding the value specified in table 8		N
	However, limits do not apply to fail-safe transformers complying with sub-clause 15.5 of IEC 61558-1		N
18	ENDURANCE		N
	Requirements and tests are specified in part 2 when necessary		N
19	ABNORMAL OPERATION		P
19.1	The risk of fire, mechanical damage or electric shock under abnormal or careless operation obviated		P
	Electronic circuits so designed and applied that a fault will not render the appliance unsafe :	(see appended table)	P
	Appliances incorporating heating elements subjected to the tests of 19.2 and 19.3, and		P
	if the appliance also has a control that limit the temperature during clause 11 it is subjected to the test of 19.4, and		P
	if applicable, to the test of 19.5		N
	Appliances incorporating PTC heating elements are also subjected to the test of 19.6		N
	Appliances incorporating motors subjected to the tests of 19.7 to 19.10, as applicable		N
	Appliances incorporating electronic circuits subjected to the tests of 19.11 and 19.12, as applicable		P

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 30 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Appliances incorporating contactors or relays subjected to the test of 19.14, being carried out before the tests of 19.11		P
	Appliances incorporating voltage selector switches subjected to the test of 19.15		N
	Unless otherwise specified, the tests are continued until a non-self-resetting thermal cut-out operates, or		N
	until steady conditions are established		P
	If a heating element or intentionally weak part becomes open-circuited, the relevant test is repeated on a second sample		N
	Kettles are not subjected to the test of 19.2 (IEC 60335-2-15)		N
	Kettles also subjected to the test of 19.101, unless the appliance incorporates a non-self-resetting thermal cut-out, in order to comply with 19.4 (IEC 60335-2-15)		N
	Kettles for which compliance with 19.101 relies on the operation of a non-self-resetting thermal cut-out are subjected to the test of 19.102 (IEC 60335-2-15)		N
19.2	Test of appliances with heating elements with restricted heat dissipation; test voltage (V), power input of 0.85 times rated power input (W) :	731W	P
	Appliances are placed as near as possible to the walls of the test corner (IEC 60335-2-15)		P
	They are tested empty with lids open or closed whichever is the more unfavourable (IEC 60335-2-15)		P
	Induction rice cookers operating under the conditions of clause 11 with the rice container empty (IEC 60335-2-15)		N
19.3	Test of 19.2 repeated; test voltage (V), power input of 1.24 times rated power input (W) :	1264,8W	P
	Kettles are operated empty at 1.15 times rated power input (IEC 60335-2-15)		N
	The test is carried out with the kettle filled with sufficient water to cover the heating element or if the heating element is not positioned inside the container, to a depth of 10 mm (IEC 60335-2-15)		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 31 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

19.4	Test conditions as in clause 11, any control limiting the temperature during tests of clause 11 short-circuited		P
	Pressure cookers: (IEC 60335-2-15)		N
	- all pressure regulating devices rendered inoperative; and		N
	- in other than dynamic pressure cookers, all protective devices that vent steam and intentionally weak parts that vent steam rendered inoperative; and		N
	- in dynamic pressure cookers, all protective devices, other than intentionally weak parts, that vent steam rendered inoperative		N
19.5	Test of 19.4 repeated on Class 0I and I appliances with tubular sheathed or embedded heating elements. No short-circuiting, but one end of the element connected to the sheath		N
	The test repeated with reversed polarity and the other end of the heating element connected to the sheath		N
	The test is not carried out on appliances intended to be permanently connected to fixed wiring and on appliances where an all-pole disconnection occurs during the test of 19.4		N
19.6	Appliances with PTC heating elements tested at rated voltage, establishing steady conditions		N
	The working voltage of the PTC heating element is increased by 5% and the appliance is operated until steady conditions are re-established. The voltage is then increased in similar steps until 1.5 times working voltage or until the PTC heating element ruptures (V) :		N
19.7	Stalling test by locking the rotor if the locked rotor torque is smaller than the full load torque, or		N
	locking moving parts of other appliances		N
	Locked rotor, capacitors open-circuited one at a time		N
	Test repeated with capacitors short-circuited one at a time, unless		N
	the capacitor is of class P2 of IEC 60252-1		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service





# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 32 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Appliances with timer or programmer supplied with rated voltage for each of the tests, for a period equal to the maximum period allowed :		N
	An electronic timer or programmer that operates to ensure compliance with the test before the maximum period under the conditions of Clause 11 is reached, is a protective electronic circuit		N
	Other appliances supplied with rated voltage for a period as specified :		N
	Espresso coffee-makers incorporating a pump operated for a period of 5 min (IEC 60335-2-15)		N
	Soy milk makers operated for one cycle of operation (IEC 60335-2-15)		N
	Winding temperatures not exceeding values specified in table 8 :	(see appended table)	N
19.8	Multi-phase motors operated at rated voltage with one phase disconnected		N
19.9	Running overload test on appliances incorporating motors intended to be remotely or automatically controlled or liable to be operated continuously		N
	Motor-operated and combined appliances for which 30.2.3 is applicable and that use overload protective devices relying on electronic circuits to protect the motor windings, are also subjected to the test		N
	Winding temperatures not exceeding values as specified :	(see appended table)	N
19.10	Series motor operated at 1.3 times rated voltage for 1 min (V) :		N
	During the test, parts not being ejected from the appliance		N
19.11	Electronic circuits, compliance checked by evaluation of the fault conditions specified in 19.11.2 for all circuits or parts of circuits, unless		P
	they comply with the conditions specified in 19.11.1		P
	Appliances incorporating an electronic circuit that relies upon a programmable component to function correctly, subjected to the test of 19.11.4.8, unless		P
	restarting does not result in a hazard		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 33 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Appliances having a device with an off position obtained by electronic disconnection, or a device placing the appliance in a stand-by mode, subjected to the tests of 19.11.4		N
	If the safety of the appliance under any of the fault conditions depends on the operation of a miniature fuse-link complying with IEC 60127, the test of 19.12 is carried out	NTC	N
	During and after each test the following is checked:		P
	- the temperature of the windings do not exceed the values specified in table 8		P
	- the appliance complies with the conditions specified in 19.13		P
	- any current flowing through protective impedance not exceeding the limits specified in 8.1.4		N
	If a conductor of a printed board becomes open-circuited, the appliance is considered to have withstood the particular test, provided both of the following conditions are met:		N
	- the base material of the printed circuit board withstands the test of Annex E		N
	- any loosened conductor does not reduce clearance or creepage distances between live parts and accessible metal parts below the values specified in clause 29		N
19.11.1	Fault conditions a) to g) in 19.11.2 are not applied to circuits or parts of circuits meeting both of the following conditions:		---
	- the electronic circuit is a low-power circuit, that is, the maximum power at low-power points does not exceed 15 W according to the tests specified		---
	- the protection against electric shock, fire hazard, mechanical hazard or dangerous malfunction of other parts of the appliance does not rely on the correct functioning of the electronic circuit		---
19.11.2	Fault conditions applied one at a time, the appliance operating under conditions specified in clause 11, but supplied at rated voltage, duration of the tests as specified:		P
	a) short circuit of functional insulation if clearances or creepage distances are less than the values specified in clause 29		---
	b) open circuit at the terminals of any component		P



Report No.: CTS190809039-L	Page 34 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	c) short circuit of capacitors, unless		P
	they comply with IEC 60384-14		---
	d) short circuit of any two terminals of an electronic component, other than integrated circuits		P
	This fault condition is not applied between the two circuits of an optocoupler		---
	e) failure of triacs in the diode mode		P
	f) failure of microprocessors and integrated circuits		P
	g) failure of an electronic power switching device		---
	Each low power circuit is short-circuited by connecting the low-power point to the pole of the supply source from which the measurements were made		---
19.11.3	If the appliance incorporates a protective electronic circuit which operates to ensure compliance with clause 19, the relevant test is repeated with a single fault simulated, as indicated in a) to g) of 19.11.2		---
19.11.4	Appliances having a device with an off position obtained by electronic disconnection, or		---
	a device that can be placed in the stand-by mode,		---
	subjected to the tests of 19.11.4.1 to 19.11.4.7, the device being set in the off position or in the stand-by mode		---
	Appliances incorporating a protective electronic circuit subjected to the tests of 19.11.4.1 to 19.11.4.7, the tests being carried out after the protective electronic circuit has operated, except that		---
	appliances operated for 30 s or 5 min during the test of 19.7 are not subjected to the tests for electromagnetic phenomena.		---
	Surge protective devices disconnected, unless		---
	They incorporate spark gaps		---
19.11.4.1	The appliance is subjected to electrostatic discharges in accordance with IEC 61000-4-2, test level 4		---



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 35 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

19.11.4.2	The appliance is subjected to radiated fields in accordance with IEC 61000-4-3, test level 3		---
19.11.4.3	The appliance is subjected to fast transient bursts in accordance with IEC 61000-4-4, test level 3 or 4 as specified		---
19.11.4.4	The power supply terminals of the appliance subjected to voltage surges in accordance with IEC 61000-4-5, test level 3 or 4 as specified		---
	An open circuit test voltage of 2 kV is applicable for the line-to-line coupling mode		---
	An open circuit test voltage of 4 kV is applicable for the line-to-earth coupling		---
	Earthed heating elements in class I appliances disconnected		---
19.11.4.5	The appliance is subjected to injected currents in accordance with IEC 61000-4-6, test level 3		---
19.11.4.6	Appliances having a rated current not exceeding 16 A are subjected to the Class 3 voltage dips and interruptions in accordance with IEC 61000-4-11		---
	Appliances having a rated current exceeding 16 A are subjected to the Class 3 voltage dips and interruptions in accordance with IEC 61000-4-34		---
19.11.4.7	The appliance is subjected to mains signals in accordance with IEC 61000-4-13, test level class 2		---
19.11.4.8	The appliance is supplied at rated voltage and operated under normal operation. After 60s the power supply is reduced to a level such that the appliance ceases to respond or parts controlled by the programmable component cease to operate		---
	The appliance continues to operate normally, or		---
	requires a manual operation to restart		---
19.12	If the safety of the appliance for any of the fault conditions specified in 19.11.2 depends on the operation of a miniature fuse-link complying with IEC 60127, the test is repeated, measuring the current flowing through the fuse-link; measured current (A); rated current of the fuse-link (A) :		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 36 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

19.13	During the tests the appliance does not emit flames, molten metal, poisonous or ignitable gas in hazardous amounts		P
	Temperature rises not exceeding the values shown in table 9 :	(see appended table)	P
	Compliance with clause 8 not impaired		P
	If the appliance can still be operated it complies with 20.2		N
	Insulation, other than of class III appliances or class III constructions that do not contain live parts, withstands the electric strength test of 16.3, the test voltage as specified in table 4:		P
	- basic insulation (V) :	1000	P
	- supplementary insulation (V) :	1750	P
	- reinforced insulation (V) :	3000	P
	After operation or interruption of a control, clearances and creepage distances across the functional insulation withstand the electric strength test of 16.3, the test voltage being twice the working voltage		N
	The appliance does not undergo a dangerous malfunction, and		P
	no failure of protective electronic circuits, if the appliance is still operable		N
	Appliances tested with an electronic switch in the off position, or in the stand-by mode:		N
	- do not become operational, or		N
	- if they become operational, do not result in a dangerous malfunction during or after the tests of 19.11.4		N
	If the appliance contains lids or doors that are controlled by one or more interlocks, one of the interlocks may be released provided that:		N
	- the lid or door does not move automatically to an open position when the interlock is released, and		N
	- the appliance does not start after the cycle in which the interlock was released		N
	During the test of 19.4, protective devices of pressure cookers other than dynamic pressure cookers operate before pressure has reached 350 kPa (IEC 60335-2-15)		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 37 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	During the test of 19.4, protective devices or intentionally weak parts of dynamic pressure cookers operate before pressure has reached 250 kPa (IEC 60335-2-15)		N
	Temperature rise of windings of induction rice cookers not exceeding the values specified in 19.7 (IEC 60335-2-15)		N
	Induction rice cookers: electric strength test carried out immediately after switching off the appliance (IEC 60335-2-15)		N
19.14	Appliances operated under the conditions of clause 11, any contactor or relay contact operating under the conditions of clause 11 being short-circuited		P
	For a relay or contactor with more than one contact, all contacts are short-circuited at the same time		P
	A relay or contactor operating only to ensure the appliance is energized for normal use is not short-circuited		N
	If more than one relay or contactor operates in clause 11, they are short-circuited in turn		N
19.15	For appliances with a mains voltage selector switch, the switch is set to the lowest rated voltage position and the highest value of rated voltage is applied		N
19.101	Kettles operated empty at 0,85 times or 1,15 times rated power input, whichever is more unfavourable, with thermal cut-out that operates during the test of 19.4 short circuited (IEC 60335-2-15)		N
	During the test, any flames keep within the enclosure of the kettle and supporting surface does not ignite		N
	After the test, live parts not be accessible		N
19.102	Kettles incorporating two self-resetting thermal cut-outs operated with one of the thermal cut-out short circuited, empty at 0.85 or 1.15 times rated power input, whichever is most unfavourable (IEC 60335-2-15)		N
	Within 2 s of the thermal cut-out operating, the kettle is filled with water having a temperature of 15 °C ± 5 °C. After 1 min, the kettle is emptied		N



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 38 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	The test is carried out 100 times		N
19.103	Appliances with detachable liquid containers: automatic transfer of liquid from one container to another is liable and safe (IEC 60335-2-15)		N
	Compliance is checked by the test as specified		N
	After the test, the appliance withstands the tests of 16.3 and		N
	no trace of water on insulation which can result in reduction of creepage distances and clearances below values specified in clause 29		N
19.104	The overloading of a soy milk maker does not result in a hazard (IEC 60335-2-15)		N
	Compliance is checked by the test as specified		N
	During the test, any flames keep within the enclosure and supporting surface does not ignite		N
	After the test, live parts not be accessible		N
19.105	When a soy milk maker is disconnected from the supply accidentally during normal use, it does not result in a hazard (IEC 60335-2-15)		N
	Compliance is checked by the test as specified		N
	During the test, any flames keep within the enclosure and supporting surface does not ignite		N
	After the test, live parts not be accessible		N
20	STABILITY AND MECHANICAL HAZARDS		P
20.1	Appliances having adequate stability		P
	Tilting test through an angle of 10°, appliance placed on an inclined plane/horizontal support, not connected to the supply mains; appliance does not overturn		P
	Tilting test repeated on appliances with heating elements, angle of inclination increased to 15°	15°	P
	Possible heating test in overturned position; temperature rise does not exceed values shown in table 9		N
20.2	Moving parts adequately arranged or enclosed as to provide protection against personal injury		N
	Protective enclosures, guards and similar parts are non-detachable, and		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 39 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	have adequate mechanical strength		N
	Enclosures that can be opened by overriding an interlock are considered to be detachable parts		N
	Self-resetting thermal cut-outs and overcurrent protective devices not causing a hazard by unexpected closure		N
	Not possible to touch dangerous moving parts with the test probe described		N
20.101	The container and cutting blades of soy milk makers have adequate mechanical strength (IEC 60335-2-15)		N
	Compliance is checked by the test as specified		N
	Container and cutting blades not broken		N
20.102	The rotating parts of soy milk makers not become loose during operation (IEC 60335-2-15)		N
	Compliance is checked by inspection and manual test as specified		N
	Fastening of screws and nuts in a direction opposite to the direction of rotation of the rotating parts considered to be a suitable means of securing the rotating parts		N
20.103	For soy milk makers: lid interlock, if any, constructed so that accidental operation of the appliance is prevented (IEC 60335-2-15)		N
	Lid interlock switches are biased-off switches		N
	If there is an interlock between the lid and the main switch, the lid is locked when the switch is in the on position		N
	When the lid is not correctly closed, the switch is locked in the off position		N
	Compliance is checked by inspection, by manual test and by applying test probe B of IEC 61032		N
21	MECHANICAL STRENGTH		P
21.1	Appliance has adequate mechanical strength and is constructed as to withstand rough handling		P
	Checked by applying 3 blows to every point of the enclosure like to be weak, in accordance with test Ehb of IEC 60068-2-75, spring hammer test, with an impact energy of 0,5 J	(see appended table)	P

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service





# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 40 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	The appliance shows no damage impairing compliance with this standard, and	0,5 J	P
	compliance with 8.1, 15.1 and clause 29 not impaired		P
	If doubt, supplementary or reinforced insulation subjected to the electric strength test of 16.3		N
	If necessary, repetition of groups of three blows on a new sample		N
	Breakage of glass parts is neglected provided that compliance with 8.1, 15.1 and 15.101 is not impaired (IEC 60335-2-15)		N
21.2	Accessible parts of solid insulation having strength to prevent penetration by sharp implements		P
	Test not applicable if the thickness of supplementary insulation is at least 1 mm and reinforced insulation at least 2 mm		P
	The insulation is tested as specified, and does withstand the electric strength test of 16.3		N
22	CONSTRUCTION		P
22.1	Appliance marked with the first numeral of the IP system, relevant requirements of IEC 60529 are fulfilled		P
22.2	Stationary appliance: means to ensure all-pole disconnection from the supply being provided:		N
	- a supply cord fitted with a plug, or		N
	- a switch complying with 24.3, or		N
	- a statement in the instruction sheet that a disconnection incorporated in the fixed wiring is to be provided, or		N
	- an appliance inlet		N
	Single-pole switches and single-pole protective devices for the disconnection of heating elements in single-phase, permanently connected class 01 and class I appliances, connected to the phase conductor		N
22.3	Appliance provided with pins: no undue strain on socket-outlets		N
	Applied torque not exceeding 0.25 Nm		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 41 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Pull force of 50N to each pin after the appliance has being placed in the heating cabinet; when cooled to room temperature the pins are not displaced by more than 1mm		N
	Each pin subjected to a torque of 0.4Nm; the pins are not rotating, unless		N
	rotating does not impair compliance with this standard		N
22.4	Appliance for heating liquids and appliance causing undue vibration not provided with pins for insertion into socket-outlets		N
22.5	No risk of electric shock when touching the pins of the plug, for appliances having a capacitor with rated capacitance equal to or greater than 0,1 $\mu$ F, the appliance being disconnected from the supply at the instant of voltage peak		P
	Voltage not exceeding 34 V (V) :	<34 V	P
	If compliance relies on the operation of an electronic circuit, the electromagnetic phenomena tests of 19.11.4.3 and 19.11.4.4 are applied		N
	The discharge test is then repeated three times, voltage not exceeding 34 V (V) :		N
22.6	Electrical insulation not affected by condensing water or leaking liquid		N
	Electrical insulation of Class II appliances not affected if a hose ruptures or seal leaks		N
	In case of doubt, test as described		N
	Drain holes, at least 5 mm in diameter or 20 mm <sup>2</sup> in area with a width of at least 3 mm (IEC 60335-2-15)		N
22.7	Adequate safeguards against the risk of excessive pressure in appliances containing liquid or gases or having steam-producing devices		N
	Additional test for espresso coffee-maker : (IEC 60335-2-15)		N
	Appliance operated with coffee filter blocked and any steam valve closed. The maximum pressure attained is measured, then the appliance is subjected to twice the measure pressure for 5 min		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 42 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	No rupture, no abnormal leakage; appliance fit for further use		N
	Maximum pressure test with pressure limiting devices made ineffective		N
	No explosion nor emission of dangerous jets of steam		N
	Last test repeated in case of rupture of an intentionally weak part: the appliance shall be terminated in the same mode		N
	Pressure cookers except dynamic pressure cookers: all pressure regulators and pressure-relief devices are rendered inoperative and lids closed. Pressure increased to two times the operating pressure of the pressure relief device during the test of 19.4		N
	Dynamic pressure cookers: the pressure is gradually increased hydraulically to 50 kPa in excess of the operating pressure of the pressure relief device or intentionally weak part during the test of 19.4		N
	No rupture of container		N
22.8	Electrical connections not subject to pulling during cleaning of compartments to which access can be gained without the aid of a tool, and that are likely to be cleaned in normal use		P
22.9	Insulation, internal wiring, windings, commutators and slip rings not exposed to oil, grease or similar substances, unless		P
	the substance has adequate insulating properties		N
22.10	Not possible to reset voltage-maintained non-self-resetting thermal cut-outs by the operation of an automatic switching device incorporated within the appliance, if:		N
	- a non-self-resetting thermal cut-out is required by the standard, and		N
	- a voltage maintained non-self-resetting thermal cut-out is used to meet it		N
	Non-self-resetting thermal motor protectors have a trip-free action, unless		N
	they are voltage maintained		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 43 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Reset buttons of non-self-resetting controls so located or protected that accidental resetting is unlikely		N
22.11	Reliable fixing of non-detachable parts that provide the necessary degree of protection against electric shock, moisture or contact with moving parts		P
	Obvious locked position of snap-in devices used for fixing such parts		N
	No deterioration of the fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing		N
	Tests as described		N
22.12	Handles, knobs etc. fixed in a reliable manner		P
	Fixing in wrong position of handles, knobs etc. indicating position of switches or similar components not possible		P
	Axial force 15 N applied to parts, the shape being so that an axial pull is unlikely to be applied		N
	Axial force 30 N applied to parts, the shape being so that an axial pull is likely to be applied		P
22.13	Unlikely that handles, when gripped as in normal use, make the operator's hand touch parts having a temperature rise exceeding the value specified for handles which are held for short periods only		P
22.14	No ragged or sharp edges creating a hazard for the user in normal use, or during user maintenance		P
	No exposed pointed ends of self-tapping screws or other fasteners, likely to be touched by the user in normal use or during user maintenance		P
22.15	Storage hooks and the like for flexible cords smooth and well rounded		---
22.16	Automatic cord reels cause no undue abrasion or damage to the sheath of the flexible cord, no breakage of conductors strands and no undue wear of contacts		---
	Cord reel tested with 6000 operations, as specified		---
	Electric strength test of 16.3, voltage of 1000 V applied		---



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 44 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

22.17	Spacers not removable from the outside by hand or by means of a screwdriver or a spanner		N
22.18	Current-carrying parts and other metal parts resistant to corrosion		N
22.19	Driving belts not relied upon to provide the required level of insulation, unless		P
	constructed to prevent inappropriate replacement		N
22.20	Direct contact between live parts and thermal insulation effectively prevented, unless		N
	material used is non-corrosive, non-hygroscopic and non-combustible		N
22.21	Wood, cotton, silk, ordinary paper and fibrous or hygroscopic material not used as insulation, unless		N
	impregnated		N
	This requirement does not apply to magnesium oxide and mineral ceramic fibres used for the electrical insulation of heating elements		N
22.22	Appliances not containing asbestos		P
22.23	Oils containing polychlorinated biphenyl (PCB) not used		P
22.24	Bare heating elements, except in class III appliances or class III constructions that do not contain live parts, adequately supported		N
	In case of rupture, the heating conductor is unlikely to come in contact with accessible metal parts		N
22.25	Sagging heating conductors, except in class III appliances or class III constructions that do not contain live parts, cannot come into contact with accessible metal parts		N
22.26	For class III constructions the insulation between parts operating at safety extra-low voltage and other live parts complies with the requirements for double or reinforced insulation		N
22.27	Parts connected by protective impedance separated by double or reinforced insulation		N
22.28	Metal parts of Class II appliances conductively connected to gas pipes or in contact with water, separated from live parts by double or reinforced insulation		P

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 45 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

22.29	Class II appliances permanently connected to fixed wiring so constructed that the required degree of access to live parts is maintained after installation		N
22.30	Parts serving as supplementary or reinforced insulation fixed so that they cannot be removed without being seriously damaged, or		P
	so constructed that they cannot be replaced in an incorrect position, and so that if they are omitted, the appliance is rendered inoperable or manifestly incomplete		P
22.31	Neither clearances nor creepage distances over supplementary and reinforced insulation reduced below values specified in clause 29 as a result of wear		P
	Neither clearances nor creepage distances between live parts and accessible parts reduced below values for supplementary insulation if wires, screws etc. become loose		P
22.32	Supplementary and reinforced insulation constructed or protected against pollution so that clearances or creepage distances are not reduced below the values in clause 29		P
	Supplementary insulation of natural or synthetic rubber resistant to ageing, or arranged and dimensioned so that creepage distances are not reduced below values specified in 29.2		P
	Ceramic material not tightly sintered, similar materials or beads alone not used as supplementary or reinforced insulation		N
	Ceramic and similar porous material in which heating conductors are embedded is considered to be basic insulation, not reinforced insulation		N
	Oxygen bomb test at 70 °C for 96 h and 16 h at room temperature		---
22.33	Conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts are not in direct contact with live parts, or		P
	unearthed metal parts separated from live parts by basic insulation only		N
	Electrodes not used for heating liquids		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 46 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	For class II constructions, conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts, not in direct contact with basic or reinforced insulation, unless		P
	the reinforced insulation consists of at least 3 layers		N
	For class II constructions, conductive liquids which are in contact with live parts, not in direct contact with reinforced insulation, unless		P
	the reinforced insulation consists of at least 3 layers		N
	An air layer not used as basic or supplementary insulation in a double insulation system if likely to be bridged by leaking liquid		N
22.34	Shafts of operating knobs, handles, levers etc. not live, unless		P
	the shaft is not accessible when the part is removed		N
22.35	For other than class III constructions, handles, levers and knobs, held or actuated in normal use, not becoming live in the event of a failure of basic insulation		P
	Such parts being of metal, and their shafts or fixings are likely to become live in the event of a failure of basic insulation, are either adequately covered by insulation material or their accessible parts are separated from their shafts or fixings by supplementary insulation		N
	This requirement does not apply to handles, levers and knobs on stationary appliances and cordless appliances, other than those of electrical components, provided they are reliably connected to an earthing terminal or earthing contact, or separated from live parts by earthed metal		N
	Insulating material covering metal handles, levers and knobs withstand the electric strength test of 16.3 for supplementary insulation		N
22.36	For appliances other than class III, handles continuously held in the hand in normal use so constructed that when gripped as in normal use, the operators hand is not likely to touch metal parts, unless		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 47 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	they are separated from live parts by double or reinforced insulation		N
22.37	Capacitors in Class II appliances not connected to accessible metal parts and their casings, if of metal, separated from accessible metal parts by supplementary insulation, unless		N
	the capacitors comply with 22.42		N
22.38	Capacitors not connected between the contacts of a thermal cut-out		N
22.39	Lamp holders used only for the connection of lamps		N
22.40	Motor-operated appliances and combined appliances intended to be moved while in operation, or having accessible moving parts, fitted with a switch to control the motor. The actuating member of the switch being easily visible and accessible		N
	If the appliance cannot operate continuously, automatically or remotely without giving rise to a hazard, appliances for remote operation being fitted with a switch for stopping the operation. The actuating member of the switch being easily visible and accessible		N
	For soy milk makers, any switch controlling the motor also disconnect electronic circuits, if their malfunction would impair compliance with this standard (IEC 60335-2-15)		N
	Compliance is checked by the tests of Clause 19 (IEC 60335-2-15)		N
22.41	No components, other than lamps, containing mercury		P
22.42	Protective impedance consisting of at least two separate components		N
	Values specified in 8.1.4 not exceeded if any one of the components are short-circuited or open-circuited		N
	Resistors checked by the test of 14.1 a) in IEC 60065		N
	Capacitors checked by the tests for class Y capacitors in IEC 60384-14		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service





# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 48 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

22.43	Appliances adjustable for different voltages, accidental changing of the setting of the voltage unlikely to occur		N
22.44	Appliances not having an enclosure that is shaped or decorated like a toy		P
22.45	When air is used as reinforced insulation, clearances not reduced below the values specified in 29.1.3 due to deformation as a result of an external force applied to the enclosure		P
22.46	For programmable protective electronic circuits used to ensure compliance with the standard, the software contains measures to control the fault/error conditions in table R.1		N
	Software that contains measures to control the fault/error conditions specified in table R.2 is to be specified in parts 2 for particular constructions or to address specific hazards		N
	These requirements are not applicable to software used for functional purpose or compliance with clause 11		N
22.47	Appliances connected to the water mains withstand the water pressure expected in normal use		N
	No leakage from any part, including any inlet water hose		N
22.48	Appliances connected to the water mains constructed to prevent backsiphonage of non-potable water		N
22.49	For remote operation, the duration of operation is to be set before the appliance can be started, unless		N
	the appliance switches off automatically or can operate continuously without hazard		N
22.50	Controls incorporated in the appliance take priority over controls actuated by remote operation		N
22.51	There is a control on the appliance manually adjusted to the setting for remote operation before the appliance can be operated in this mode		N
	There is a visual indication showing that the appliance is adjusted for remote operation		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 49 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	These requirements not necessary on appliances that can operate as follows, without giving rise to a hazard:	N
	- continuously, or	N
	- automatically, or	N
	- remotely	N
22.52	Socket-outlets on appliances accessible to the user in accordance with the socket-outlet system used in the country in which the appliance is sold	N
22.53	Class II appliances and class III appliances that incorporate functionally earthed parts have at least double insulation or reinforced insulation between live parts and the functionally earthed parts	N
22.54	Button cells and batteries designated R1 not accessible without the aid of a tool, unless	N
	the cover of their compartment can only be opened after at least two independent movements have been applied simultaneously	N
22.55	Devices that are operated by the user to stop the intended function of the appliance, if any, shall be distinguished from other manual devices by means of shape	N
22.56	Detachable power supply part shall be provided with the part of class III construction of the appliance	N
22.57	The properties of non-metallic materials shall not degrade from exposure to UV-C radiation generated from UV sources provided for microbiological control within the appliance such that they no longer comply with this standard. This requirement does not apply to glass,ceramics or similar materials	N
22.101	Kettles constructed so that the lid does not fall off when water is poured out (IEC 60335-2-15)	N
	Compliance is checked by the test as specified	N
	Lid not fall off and water only emitted from the spout	N



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 50 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

22.102	Kettles so constructed that there are no sudden jets of steam or hot water likely to expose the user to a hazard when the appliance is used as in normal use (IEC 60335-2-15)		N
	Compliance is checked by inspection during the test of clause 11		N
22.103	Appliance coupler of cordless appliances constructed to withstand the stresses occurring during normal use (IEC 60335-2-15)		N
	Compliance is checked by the test as specified		N
	Appliance is placed on its stand and withdrawn for:		N
	- cordless kettles 10 000 times		N
	- cordless coffee makers 10 000 times		N
	- other cordless appliances 6 000 times		N
	The test continued without current flowing for a further 10 000 times for cordless kettles and cordless coffee makers, or		N
	6 000 times for other cordless appliances		N
	If a single stand is supplied with more than one cordless appliance, the test for each cordless appliance is carried out using the same stand		N
	The appliance is suitable for further use and compliance with 8.1, 16.3, 27.5 and clause 29 not be impaired		N
	The test is carried out without current flowing if the connection contacts cannot make or break on load		N
22.104	Portable appliances in which water boil with a container greater than 3 l is filled to its rated capacity with the lid closed in accordance with instructions for use (IEC 60335-2-15)		P
	The plane is slowly inclined to an angle of 25 ° ; if the appliance overturns, it is left in this position for 10 s and then returned to its normal position		P
	The rate of discharge of liquid does not exceed 16 l/min		P

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 51 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

22.105	Fixed appliances for boiling water constructed so that the container is always open to the atmosphere through an aperture of at least 5 mm in diameter or 20 mm <sup>2</sup> in area with a width of at least 3 mm (IEC 60335-2-15)		N
	Aperture not likely to be obstructed in normal use		N
	If the appliance has provisions for discharging steam or water overflowing, the discharge aperture shall be at the base of the appliance and discharge vertically downwards		N
22.106	Espresso coffee-maker: not possible to remove the filter by a simple operation while there is hazardous pressure within the container (IEC 60335-2-15)		N
22.107	Pressure cookers incorporate a non-self-resetting pressure or temperature responsive pressure relief device (IEC 60335-2-15)		N
22.108	Pressure cooker: not possible to remove the lid when the inner pressure is excessive (IEC 60335-2-15)		N
	Pressure test at 4 kPa and 100 N		N
	No hazardous displacement of lid at removal		N
	Test not carried out on pressure cookers when the lid is secured by screw clamps or other devices that ensure that the pressure is automatically reduced in a controlled manner before the lid can be removed		N
22.109	Pressure cookers constructed so that the pressure in the container is not excessive when the lid is not closed or is incorrectly fitted (IEC 60335-2-15)		N
	Compliance is checked by the test as specified		N
	Pressure not exceeding 4,0 kPa		N
22.110	Feeding-bottle heater: visible or audible signal to indicate the end of the heating period (IEC 60335-2-15)		N
22.111	Espresso coffee-makers, incorporating a pressurized reservoir filled by the user constructed so that there is no spillage of water or sudden jets of steam or hot water (IEC 60335-2-15)		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 52 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	When removing the filling cap of the pressurized reservoir, before the cap is removed completely, the pressure relieves in a controlled manner		N
	Compliance is checked by inspection during the test of clause 11 and by removing the filling cap at the end of the test		N
22.112	Soy milk makers constructed so that steam or hot water are not ejected which may expose the user to a hazard (IEC 60335-2-15)		N
22.113	Appliances with moving mechanical parts constructed so that lubricants are prevented from polluting food compartments (IEC 60335-2-15)		N
22.114	Appliances constructed so that food or liquids are prevented from penetrating into places that could cause electrical or mechanical faults (IEC 60335-2-15)		P
23	INTERNAL WIRING		P
23.1	Wireways smooth and free from sharp edges		P
	Wires protected against contact with burrs, cooling fins etc.		P
	Wire holes in metal well-rounded or provided with bushings		N
	Wiring effectively prevented from coming into contact with moving parts		N
23.2	Beads etc. on live wires cannot change their position, and are not resting on sharp edges		P
	Beads inside flexible metal conduits contained within an insulating sleeve		N
23.3	Electrical connections and internal conductors movable relatively to each other not exposed to undue stress		P
	Flexible metallic tubes not causing damage to insulation of conductors		N
	Open-coil springs not used		N
	Adequate insulating lining provided inside a coiled spring, the turns of which touch one another		N
	No damage after 10 000 flexings for conductors flexed during normal use, or		---

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 53 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	100 flexings for conductors flexed during user maintenance		---
	Electric strength test of 16.3, 1000 V between live parts and accessible metal parts		---
	Not more than 10% of the strands of any conductor broken, and		---
	not more than 30% for wiring supplying circuits that consume no more than 15W		---
23.4	Bare internal wiring sufficiently rigid and fixed		N
23.5	The insulation of internal wiring subjected to the supply mains voltage withstanding the electrical stress likely to occur in normal use		P
	Basic insulation electrically equivalent to the basic insulation of cords complying with IEC 60227 or IEC 60245, or		P
	no breakdown when a voltage of 2000 V is applied for 15 min between the conductor and metal foil wrapped around the insulation		P
	For class II construction, the requirements for supplementary insulation and reinforced insulation apply,		P
	except that the sheath of a cord complying with IEC 60227 or IEC 60245 may provide supplementary insulation.		N
	A single layer of internal wiring insulation does not provide reinforced insulation		P
23.6	Sleeving used as supplementary insulation on internal wiring retained in position by clamping at both ends, or		N
	be such that it can only be removed by breaking or cutting		N
23.7	The colour combination green/yellow only used for earthing conductors		P
23.8	Aluminium wires not used for internal wiring		P
23.9	Stranded conductors not consolidated by soldering where they are subjected to contact pressure, unless		P
	the contact pressure is provided by spring terminals		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 54 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

23.10	The insulation and sheath of internal wiring, incorporated in external hoses for the connection of an appliance to the water mains, at least equivalent to that of light polyvinyl chloride sheathed flexible cord (60227 IEC 52)		N
24	COMPONENTS		P
24.1	Components comply with safety requirements in relevant IEC standards		P
	List of components :	(see appended table)	P
	Motors not required to comply with IEC 60034-1, they are tested as part of the appliance		N
	Relays tested as part of the appliance, or	Type approved already	N
	alternatively acc. to IEC 60730-1, and meeting the additional requirements in IEC 60335-1		P
	The requirements of Clause 29 apply between live parts of components and accessible parts of the appliance		P
	Components can comply with the requirements for clearances and creepage distances for functional insulation in the relevant component standard		P
	30.2 of this standard apply to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections		P
	Components that have not been previously tested to comply with the IEC standard for the relevant component are tested according to the requirements of 30.2		P
	Components that have been previously tested to comply with the resistance to fire requirements in the IEC standard for the relevant component need not be retested provided the specified conditions are met		P
	If these conditions are not satisfied, the component is tested as part of the appliance.		P
	Power electronic converter circuits not required to comply with IEC 62477-1, they are tested as part of the appliance		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 55 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	If components have not been tested and found to comply with relevant IEC standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		N
	For components mentioned in 24.1.1 to 24.1.9 no additional tests specified in the relevant component standard are necessary other than those specified in 24.1.1 to 24.1.9		N
	Components not tested and found to comply with relevant IEC standard and components not marked or not used in accordance with its marking, tested under the conditions occurring in the appliance		N
	Lampholders and starterholders that have not being tested and found to comply with the relevant IEC standard, tested as a part of the appliance and additionally according to the gauging and interchangeability requirements of the relevant IEC standard		N
	No additional tests specified for nationally standardized plugs such as those detailed in IEC/TR 60083 or connectors complying with the standard sheets of IEC 60320-1 and IEC 60309		N
24.1.1	Capacitors likely to be permanently subjected to the supply voltage and used for radio interference suppression or for voltage dividing, comply with IEC 60384-14		---
	If the capacitors have to be tested, they are tested according to Annex F		---
24.1.2	Transformers in associated switch mode power supplies comply with Annex BB of IEC 61558-2-16		---
	Safety isolating transformers comply with IEC 61558-2-6		---
	If they have to be tested, they are tested according to Annex G		---
24.1.3	Switches comply with IEC 61058-1, the number of cycles of operation being at least 10 000		---
	If they have to be tested, they are tested according to Annex H		---
	If the switch operates a relay or contactor, the complete switching system is subjected to the test		---

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service





Report No.: CTS190809039-L	Page 56 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	If the switch only operates a motor starting relay complying with IEC 60730-2-10 with the number of cycles of a least 10 000 as specified, the complete switching system need not be tested		---
	Switches incorporated in espresso coffee-makers for initiating brewing or steaming tested for 10 000 cycles (IEC 60335-2-15)		---
	Switches incorporated in dynamic pressure cookers for controlling heaters are subjected to 50 000 cycles of operation and are tested under the conditions of Clause 11 with the appliance supplied at rated voltage (IEC 60335-2-15)		---
24.1.4	Automatic controls comply with IEC 60730-1 with the relevant part 2. The number of cycles of operation being at least:		---
	- thermostats:	10 000	---
	- temperature limiters:	1 000	---
	- self-resetting thermal cut-outs:	300	---
	- voltage maintained non-self-resetting thermal cut-outs:	1 000	---
	- other non-self-resetting thermal cut-outs:	30	---
	- timers:	3 000	---
	- energy regulators:	10 000	---
	The number of cycles for controls operating during clause 11 need not be declared, if the appliance meets the requirements of this standard when they are short-circuited		---
	Thermal motor protectors are tested in combination with their motor under the conditions specified in Annex D		---
	For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, the degree of protection declared for subclause 6.5.2 of IEC 60730-2-8 is IPX7		---



Report No.: CTS190809039-L	Page 57 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Thermal cut-outs of the capillary type comply with the requirements for type 2.K controls in IEC 60730-2-9		---
	Self-resetting thermal cut-outs required for compliance with the test of 19.101 are subjected to 3 000 cycles of operation (IEC 60335-2-15)		---
24.1.5	Appliance couplers comply with IEC 60320-1		P
	However, for class II appliances classified higher than IPX0, the appliance couplers comply with IEC 60320-2-3		---
	Interconnection couplers comply with IEC 60320-2-2		---
	Appliance couplers incorporating thermostats, thermal cut-outs or fuses in the connectors comply with IEC 60320-1, except that: (IEC 60335-2-15)		---
	- the earthing contact of connector is allowed to be accessible, if contact is not likely to be gripped during insertion or withdrawal of the connector		---
	- the temperature required for the test of clause 18 is that measured on the pins of the appliance inlet during test of clause 11 of this standard		---
	- the breaking-capacity test of clause 19 carried out using the inlet of the appliance		---
	- the temperature rise of current-carrying parts specified in clause 21 not determined		---
	Thermal controls are not allowed in connectors complying with the standard sheets of IEC 60320-1 (IEC 60335-2-15)		---
24.1.6	Small lamp holders similar to E10 lampholders comply with IEC 60238, the requirements for E10 lampholders being applicable		---
24.1.7	For remote operation of the appliance via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is IEC 62151		---
24.1.8	The relevant standard for thermal links is IEC 60691		P
	Thermal links not complying with IEC 60691 are considered to be an intentionally weak part for the purposes of Clause 19		---



Report No.: CTS190809039-L	Page 58 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

24.1.9	Contactors and relays, other than motor starting relays, tested as part of the appliance		---
	They are also tested in accordance with Clause 17 of IEC 60730-1, the number of cycles of operations in 24.1.4 selected according to the contactor or relay function in the appliance :		---
24.2	Appliances not fitted with:		P
	- switches or automatic controls in flexible cords		P
	- devices causing the protective device in the fixed wiring to operate in the event of a fault in the appliance		P
	- thermal cut-outs that can be reset by soldering, unless		N
	the solder has a melting point of at least 230 °C		N
24.3	Switches intended for all-pole disconnection of stationary appliances are directly connected to the supply terminals and have a contact separation in all poles, providing full disconnection under overvoltage category III conditions		N
24.4	Plugs and socket-outlets for extra-low voltage circuits and heating elements, not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1 or with connectors and appliance inlets complying with the standard sheets of IEC 60320-1		N
	Not applicable to the connection between the appliance and the stand of cordless appliances (IEC 60335-2-15)		N
24.5	Capacitors in auxiliary windings of motors marked with their rated voltage and capacitance, and used accordingly		N
	Voltage across capacitors in series with a motor winding does not exceed 1,1 times rated voltage, when the appliance is supplied at 1,1 times rated voltage under minimum load		N
24.6	Working voltage of motors connected to the supply mains and having basic insulation that is inadequate for the rated voltage of the appliance, not exceeding 42 V		N
	In addition, the motors comply with the requirements of Annex I		N



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 59 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

24.7	Detachable hose-sets for connection of appliances to the water mains comply with IEC 61770		N
	They are supplied with the appliance		N
	Appliances intended to be permanently connected to the water mains not connected by a detachable hose-set		N
24.8	Motor running capacitors in appliances for which 30.2.3 is applicable and that are permanently connected in series with a motor winding, not causing a hazard in event of a failure		N
	One or more of the following conditions are to be met:		N
	- the capacitors are of class P2 according to IEC 60252-1		N
	- the capacitors are housed within a metallic or ceramic enclosure		N
	- the distance of separation of the outer surface to adjacent non-metallic parts exceeds 50 mm		N
	- adjacent non-metallic parts within 50 mm withstand the needle-flame test of Annex E		N
	- adjacent non-metallic parts within 50 mm classified as at least V-1 according to IEC 60695-11-10		N
24.101	Devices incorporated in appliance, other than kettles, in order to comply with 19.4 are non-self-resetting (IEC 60335-2-15)		P
	However, self-resetting thermal cut-outs are allowed for fixed water boilers, if they have been tested for 10 000 cycles of operation		N
	Compliance is checked by inspection and during the test of 19.4		N
25	SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS		P
25.1	Appliance not intended for permanent connection to fixed wiring, means for connection to the supply:		P
	- supply cord fitted with a plug, the current rating and voltage rating of the plug being not less than the corresponding ratings of its associated appliance		P
	- an appliance inlet having at least the same degree of protection against moisture as required for the appliance, or		P

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 60 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	- pins for insertion into socket-outlets		N
	Appliances incorporating an appliance inlet other than those standardized in IEC 60320-1 are supplied with a cord set (IEC 60335-2-15)		P
25.2	Appliance not provided with more than one means of connection to the supply mains		P
	Stationary appliance for multiple supply may be provided with more than one means of connection, provided electric strength test of 1250 V for 1 min between each means of connection causes no breakdown		N
25.3	Appliance intended to be permanently connected to fixed wiring provided with one of the following means for connection to the supply mains:		N
	- a set of terminals allowing the connection of a flexible cord		N
	- a fitted supply cord		N
	- a set of supply leads accommodated in a suitable compartment		N
	- a set of terminals for the connection of cables of fixed wiring, cross-sectional areas specified in 26.6, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N
	- a set of terminals and cable entries, conduit entries, knock-outs or glands, allowing connection of appropriate types of cable or conduit, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N
	For a fixed appliance constructed so that parts can be removed to facilitate easy installation, this requirement is met if it is possible to connect the fixed wiring without difficulty after a part of the appliance has been fixed to its support		N
25.4	Cable and conduit entries, rated current of appliance not exceeding 16 A, dimension according to table 10 (mm) :		N
	Introduction of conduit or cable does not reduce clearances or creepage distances below values specified in clause 29		N
25.5	Method for assembling the supply cord to the appliance:		P
	- type X attachment		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 61 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	- type Y attachment		P
	- type Z attachment, if allowed in relevant part 2		N
	Type Z attachment is allowed for egg boilers, feeding bottle heaters, yoghurt makers and stands of cordless appliances (IEC 60335-2-15)		N
	Type X attachment, other than those with a specially prepared cord, not used for flat twin tinsel cords		N
	For multi-phase appliances supplied with a supply cord and that are intended to be permanently connected to fixed wiring, the supply cord is assembled to the appliance by type Y attachment		N
25.6	Plugs fitted with only one flexible cord		P
25.7	Supply cords, other than for class III appliances, being one of the following types:		P
	- rubber sheathed (at least 60245 IEC 53)		N
	- polychloroprene sheathed (at least 60245 IEC 57)		N
	- polyvinyl chloride sheathed. Not used if they are likely to touch metal parts having a temperature rise exceeding 75 K during the test of clause 11		N
	light polyvinyl chloride sheathed cord (60227 IEC 52), for appliances not exceeding 3 kg		N
	ordinary polyvinyl chloride sheathed cord (60227 IEC 53), for other appliances	H05VV-F	P
	- heat resistant polyvinyl chloride sheathed. Not used for type X attachment other than specially prepared cords		N
	heat-resistant light polyvinyl chloride sheathed cord (60227 IEC 56), for appliances not exceeding 3 kg		N
	heat-resistant polyvinyl chloride sheathed cord (60227 IEC 57), for other appliances		N
	Supply cords for class III appliances adequately insulated		N
	Test with 500 V for 2 min for supply cords of class III appliances that contain live parts		N
	Supply cord of livestock feed boilers are polychloroprene sheathed (IEC 60335-2-15)		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 62 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

25.8	Nominal cross-sectional area of supply cords not less than table 11; rated current (A); cross-sectional area (mm <sup>2</sup> ) :	0,75 mm <sup>2</sup>	P
	Portable appliances having a rated current of up to 10 A may incorporate a supply cord having a nominal cross-sectional area of 0,75 mm <sup>2</sup> , if the length is less than 2 m (IEC 60335-2-15)	less than 2 m	P
25.9	Supply cords not in contact with sharp points or edges		P
25.10	Supply cord of class I appliances have a green/yellow core for earthing		P
	In multi-phase appliances, the colour of the neutral conductor of the supply cord is blue.		N
25.11	Conductors of supply cords not consolidated by soldering where they are subject to contact pressure, unless		N
	the contact pressure is provided by spring terminals		N
25.12	Insulation of the supply cord not damaged when moulding the cord to part of the enclosure		N
25.13	Inlet openings so constructed as to prevent damage to the supply cord		N
	If it is not evident that the supply cord can be introduced without risk of damage, a non-detachable lining or bushing complying with 29.3 for supplementary insulation provided		N
	If unsheathed supply cord, a similar additional bushing or lining is required, unless the appliance is		N
	class 0, or		N
	a class III appliance not containing live parts		N
25.14	Supply cords moved while in operation adequately protected against excessive flexing		N
	Flexing test, as described:		N
	- applied force (N) :		N
	- number of flexings :		N
	The test does not result in:		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 63 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	- short-circuit between the conductors, such that the current exceeds a value of twice the rated current		N
	- breakage of more than 10% of the strands of any conductor		N
	- separation of the conductor from its terminal		N
	- loosening of any cord guard		N
	- damage to the cord or the cord guard		N
	- broken strands piercing the insulation and becoming accessible		N
25.15	For appliances with supply cord and appliances to be permanently connected to fixed wiring by a flexible cord, conductors of the supply cord relieved from strain, twisting and abrasion by use of cord anchorage		N
	The cord cannot be pushed into the appliance to such an extent that the cord or internal parts of the appliance can be damaged		N
	Pull and torque test of supply cord:		N
	- fixed appliances: pull 100 N; torque (not on automatic cord reel) (Nm) :		N
	- other appliances: values shown in table 12: mass (kg); pull (N); torque (not on automatic cord reel) (Nm) :		N
	Pull and torque test of supply cord, values shown in table 12: mass (kg); pull (N); torque (not on automatic cord reel) (Nm) :		N
	Cord not damaged and max. 2 mm displacement of the cord		N
25.16	Cord anchorages for type X attachments constructed and located so that:		N
	- replacement of the cord is easily possible		N
	- it is clear how the relief from strain and the prevention of twisting are obtained		N
	- they are suitable for different types of supply cord		N
	- cord cannot touch the clamping screws of cord anchorage if these screws are accessible, unless		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service





# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 64 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	they are separated from accessible metal parts by supplementary insulation		N
	- the cord is not clamped by a metal screw which bears directly on the cord		N
	- at least one part of the cord anchorage securely fixed to the appliance, unless		N
	it is part of a specially prepared cord		N
	- screws which have to be operated when replacing the cord do not fix any other component, unless		N
	the appliance becomes inoperative or incomplete or the parts cannot be removed without a tool		N
	- if labyrinths can be bypassed the test of 25.15 is nevertheless withstood		N
	- for class 0, 0I and I appliances they are of insulating material or are provided with an insulating lining, unless		N
	failure of the insulation of the cord does not make accessible metal parts live		N
	- for class II appliances they are of insulating material, or		N
	if of metal, they are insulated from accessible metal parts by supplementary insulation		N
	After the test of 25.15, under the conditions specified, the conductors have not moved by more than 1 mm in the terminals		N
25.17	Adequate cord anchorages for type Y and Z attachment, test with the cord supplied with the appliance		N
25.18	Cord anchorages only accessible with the aid of a tool, or		N
	Constructed so that the cord can only be fitted with the aid of a tool		N
25.19	Type X attachment, glands not used as cord anchorage in portable appliances		N
	Tying the cord into a knot or tying the cord with string not used		N
25.20	The conductors of the supply cord for type Y and Z attachment insulated from accessible metal parts		P

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 65 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

25.21	Space for supply cord for type X attachment or for connection of fixed wiring constructed:	N
	- to permit checking of conductors with respect to correct positioning and connection before fitting any cover	N
	- so there is no risk of damage to the conductors or their insulation when fitting the cover	N
	- for portable appliances, so that the uninsulated end of a conductor, if it becomes free from the terminal, prevented from contact with accessible metal parts	N
	2 N test to the conductor for portable appliances; no contact with accessible metal parts	N
25.22	Appliance inlets:	N
	- live parts not accessible during insertion or removal	N
	Requirement not applicable to appliance inlets complying with IEC 60320-1	N
	- connector can be inserted without difficulty	N
	- the appliance is not supported by the connector	N
	- not for cold conditions if temp. rise of external metal parts exceeds 75 K during clause 11, unless	N
	the supply cord is unlikely to touch such metal parts	N
	Soy milk maker inlets located so that pollution by soy milk is unlikely to occur during normal use (IEC 60335-2-15)	N
25.23	Interconnection cords comply with the requirements for the supply cord, except that:	N
	- the cross-sectional area of the conductors is determined on the basis of the maximum current during clause 11	N
	- the thickness of the insulation may be reduced	N
	If necessary, electric strength test of 16.3	N
25.24	Interconnection cords not detachable without the aid of a tool if compliance with this standard is impaired when they are disconnected	N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 66 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

25.25	Dimensions of pins that are inserted into socket-outlets compatible with the dimensions of the relevant socket-outlet.		P
	Dimensions of pins and engagement face in accordance with the dimensions of the relevant plug in IEC/TR 60083		P
25.101	Supply cords of kettles are not longer than 75 cm, unless they are helically coiled (IEC 60335-2-15)		N
	If a cordless kettle has a cord storage facility, the length of the cord is measured after storing as much of the cord as possible		N
	The length of the cord is measured between the plug and the point where the cord or cord guard enters the appliance		N
26	TERMINALS FOR EXTERNAL CONDUCTORS		P
26.1	Appliances provided with terminals or equally effective devices for connection of external conductors		P
	Terminals only accessible after removal of a non-detachable cover, except		P
	for class III appliances that do not contain live parts		N
	Earthing terminals may be accessible if a tool is required to make the connections and means are provided to clamp the wire independently from its connection		N
26.2	Appliances with type X attachment and appliances for the connection of cables to fixed wiring provided with terminals in which connections are made by means of screws, nuts or similar devices, unless		N
	the connections are soldered		N
	Screws and nuts not used to fix any other component, except		N
	internal conductors, if so arranged that they are unlikely to be displaced when fitting the supply conductors		N
	If soldered connections used, the conductor so positioned or fixed that reliance is not placed on soldering alone, unless		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 67 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	barriers provided so that neither clearances nor creepage distances between live parts and other metal parts reduced below the values for supplementary insulation if the conductor becomes free at the soldered joint		N
26.3	Terminals for type X attachment and for connection of cables of fixed wiring so constructed that the conductor is clamped between metal surfaces with sufficient contact pressure but without damaging the conductor		N
	Terminals fixed so that when the clamping means is tightened or loosened:		N
	- the terminal does not become loose		N
	- internal wiring is not subjected to stress		N
	- neither clearances nor creepage distances are reduced below the values in clause 29		N
	Compliance checked by inspection and by the test of subclause 9.6 of IEC 60999-1, the torque applied being equal to two-thirds of the torque specified (Nm) :		N
	No deep or sharp indentations of the conductors		N
26.4	Terminals for type X attachment, except those having a specially prepared cord and those for the connection of cables of fixed wiring, no special preparation of conductors such as by soldering, use of cable lugs, eyelets or similar, and		N
	so constructed or placed that conductors prevented from slipping out when clamping screws or nuts are tightened		N
26.5	Terminals for type X attachment so located or shielded that if a wire of a stranded conductor escapes, no risk of accidental connection to other parts that result in a hazard		N
	Stranded conductor test, 8 mm insulation removed		N
	No contact between live parts and accessible metal parts and,		N
	for class II constructions, between live parts and metal parts separated from accessible metal parts by supplementary insulation only		P



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 68 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

26.6	Terminals for type X attachment and for connection of cables of fixed wiring suitable for connection of conductors with cross-sectional area according to table 13; rated current (A); nominal cross-sectional area (mm <sup>2</sup> ) :		N
	If a specially prepared cord is used, terminals need only be suitable for that cord		N
26.7	Terminals for type X attachment, except in class III appliances not containing live parts, accessible after removal of a cover or part of the enclosure		N
26.8	Terminals for the connection of fixed wiring, including the earthing terminal, located close to each other		N
26.9	Terminals of the pillar type constructed and located as specified		N
26.10	Terminals with screw clamping and screwless terminals not used for flat twin tinsel cords, unless		N
	conductors ends fitted with means suitable for screw terminals		N
	Pull test of 5 N to the connection		N
26.11	For type Y and Z attachment, soldered, welded, crimped or similar connections may be used		P
	For Class II appliances, the conductor so positioned or fixed that reliance is not placed on soldering, welding or crimping alone		N
	If soldering, welding or crimping alone used, barriers provided so that clearances and creepage distances between live parts and other metal parts are not reduced below the values for supplementary insulation if the conductor becomes free		N
27	PROVISION FOR EARTHING		P
27.1	Accessible metal parts of Class 0I and I appliances permanently and reliably connected to an earthing terminal or earthing contact of the appliance inlet		P
	Earthing terminals and earthing contacts not connected to the neutral terminal		P
	Class 0, II and III appliances have no provision for protective earthing		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 69 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Class II appliances and class III appliances can incorporate an earth for functional purposes		N
	Safety extra-low voltage circuits not earthed, unless		N
	protective extra-low voltage circuits		N
27.2	Clamping means of earthing terminals adequately secured against accidental loosening		P
	Terminals for the connection of external equipotential bonding conductors allow connection of conductors of 2.5 to 6 mm <sup>2</sup> , and		P
	- do not provide earthing continuity between different parts of the appliance, and		P
	- conductors cannot be loosened without the aid of a tool		P
	Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes		N
27.3	For a detachable part having an earth connection and being plugged into another part of the appliance, the earth connection is made before and separated after current-carrying connections when removing the part		P
	For appliances with supply cords, current-carrying conductors become taut before earthing conductor, if the cord slips out of the cord anchorage		N
	Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes		N
27.4	No risk of corrosion resulting from contact between parts of the earthing terminal and the copper of the earthing conductor or other metal		P
	Parts providing earthing continuity, other than parts of a metal frame or enclosure, have adequate resistance to corrosion		P
	If of steel, these parts provided with an electroplated coating with a thickness at least 5 µm		N
	Adequate protection against rusting of parts of coated or uncoated steel, only intended to provide or transmit contact pressure		P

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 70 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	In the body of the earthing terminal is a part of a frame or enclosure of aluminium or aluminium alloys, precautions taken to avoid risk of corrosion		N
	Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes		N
27.5	Low resistance of connection between earthing terminal and earthed metal parts		P
	This requirement does not apply to connections providing earthing continuity in the protective extra-low voltage circuit, provided the clearances of basic insulation are based on the rated voltage of the appliance		N
	Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes		N
	Resistance not exceeding 0,1 $\Omega$ at the specified low-resistance test ( $\Omega$ ) :	0,05 $\Omega$ <0,1 $\Omega$	P
27.6	The printed conductors of printed circuit boards not used to provide earthing continuity in hand-held appliances.		N
	They may be used to provide earthing continuity in other appliances if at least two tracks are used with independent soldering points and the appliance complies with 27.5 for each circuit		N
	Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes		N
28.1	SCREWS AND CONNECTIONS		P
	Fixings, electrical connections and connections providing earthing continuity withstand mechanical stresses		P
	Screws not of soft metal liable to creep, such as zinc or aluminium		P
	Diameter of screws of insulating material min. 3 mm		N
	Screws of insulating material not used for any electrical connections or connections providing earthing continuity		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 71 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Screws used for electrical connections or connections providing earthing continuity screwed into metal		P
	Screws not of insulating material if their replacement by a metal screw can impair supplementary or reinforced insulation		P
	For type X attachment, screws to be removed for replacement of supply cord or for user maintenance, not of insulating material if their replacement by a metal screw impairs basic insulation		N
	For screws and nuts; torque-test as specified in table 14 :	(see appended table)	P
28.2	Electrical connections and connections providing earthing continuity constructed so that contact pressure is not transmitted through non-ceramic insulating material liable to shrink or distort, unless		P
	there is resiliency in the metallic parts to compensate for shrinkage or distortion of the insulating material		P
	This requirement does not apply to electrical connections in circuits of appliances for which:		N
	30.2.2 is applicable and that carry a current not exceeding 0,5 A		N
	30.2.3 is applicable and that carry a current not exceeding 0,2 A		N
28.3	Space-threaded (sheet metal) screws only used for electrical connections if they clamp the parts together		N
	Thread-cutting (self-tapping) screws and thread rolling screws only used for electrical connections if they generate a full form standard machine screw thread		N
	Thread-cutting (self-tapping) screws not used if they are likely to be operated by the user or installer		N
	Thread-cutting, thread rolling and space threaded screws may be used in connections providing earthing continuity provided it is not necessary to disturb the connection:		N
	- in normal use,		N
	- during user maintenance,		N





# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 72 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	- when replacing a supply cord having a type X attachment, or		N
	- during installation		N
	At least two screws being used for each connection providing earthing continuity, unless		N
	the screw forms a thread having a length of at least half the diameter of the screw		N
28.4	Screws and nuts that make mechanical connection secured against loosening if they also make electrical connections or connections providing earthing continuity		P
	This requirement does not apply to screws in the earthing circuit if at least two screws are used, or		N
	if an alternative earthing circuit is provided		P
	Rivets for electrical connections or connections providing earthing continuity secured against loosening if the connections are subjected to torsion		P
29	CLEARANCES, CREEPAGE DISTANCES AND SOLID INSULATION		P
	Clearances, creepage distances and solid insulation withstand electrical stress		P
	For coatings used on printed circuits boards to protect the microenvironment (Type 1) or to provide basic insulation (Type 2), Annex J applies :		N
	The microenvironment is pollution degree 1 under type 1 protection		N
	For type 2 protection, the spacing between the conductors before the protection is applied is not less than the values specified in Table 1 of IEC 60664-3		N
	These values apply to functional, basic, supplementary and reinforced insulation :		P
29.1	Clearances not less than the values specified in table 16, taking into account the rated impulse voltage for the overvoltage categories of table 15, unless :	(see appended table)	P
	for basic insulation and functional insulation they comply with the impulse voltage test of clause 14		P

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 73 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	However, if the distances are affected by wear, distortion, movement of the parts or during assembly, the clearances for rated impulse voltages of 1500V and above are increased by 0,5 mm and the impulse voltage test is not applicable		N
	For appliances intended for use at altitudes exceeding 2 000 m, the clearances in Table 16 is increased according to the relevant multiplier values in Table A.2 of IEC 60664-1		N
	Impulse voltage test is not applicable:		P
	- when the microenvironment is pollution degree 3, or	pollution degree 3	P
	- for basic insulation of class 0 and class 01 appliances, or		N
	- to appliances intended for use at altitudes exceeding 2 000 m		N
	Appliances are in overvoltage category II	overvoltage category II	P
	A force of 2 N is applied to bare conductors, other than heating elements		P
	A force of 30 N is applied to accessible surfaces		P
29.1.1	Clearances of basic insulation withstand the overvoltages, taking into account the rated impulse voltage		P
	The values of table 16 or the impulse voltage test of clause 14 are applicable :	(see appended table)	N
	Clearance at the terminals of tubular sheathed heating elements may be reduced to 1,0 mm if the microenvironment is pollution degree 1		N
	Lacquered conductors of windings considered to be bare conductors		N
29.1.2	Clearances of supplementary insulation not less than those specified for basic insulation in table 16 :	(see appended table)	P
29.1.3	Clearances of reinforced insulation not less than those specified for basic insulation in table 16, using the next higher step for rated impulse voltage :	(see appended table)	P



Report No.: CTS190809039-L	Page 74 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	For double insulation, with no intermediate conductive part between basic and supplementary insulation, clearances are measured between live parts and the accessible surface, and the insulation system is treated as reinforced insulation		N
29.1.4	Clearances for functional insulation are the largest values determined from:		P
	- table 16 based on the rated impulse voltage :	(see appended table)	P
	- table F.7a in IEC 60664-1, frequency not exceeding 30 kHz		N
	- clause 4 of IEC 60664-4, frequency exceeding 30 kHz		N
	If values of table 16 are largest, the impulse voltage test of clause 14 may be applied instead, unless		N
	the microenvironment is pollution degree 3, or	pollution degree 3	P
	the distances can be affected by wear, distortion, movement of the parts or during assembly		N
	However, clearances are not specified if the appliance complies with clause 19 with the functional insulation short-circuited		N
	Lacquered conductors of windings considered to be bare conductors		N
	However, clearances at crossover points are not measured		N
	Clearance between surfaces of PTC heating elements may be reduced to 1mm		N
29.1.5	Appliances having higher working voltages than rated voltage, clearances for basic insulation are the largest values determined from:		N
	- table 16 based on the rated impulse voltage :		N
	- table F.7a in IEC 60664-1, frequency not exceeding 30 kHz		N
	- clause 4 of IEC 60664-4, frequency exceeding 30 kHz		N
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1 or Clause 4 of IEC 60664-4, the clearances of supplementary insulation are not less than those specified for basic insulation		



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 75 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1, the clearances of reinforced insulation dimensioned as specified in Table F.7a are to withstand 160% of the withstand voltage required for basic insulation		N
	If clearances for basic insulation are selected from Clause 4 of IEC 60664-4, the clearances of reinforced insulation are twice the value required for basic insulation		N
	If the secondary winding of a step-down transformer is earthed, or if there is an earthed screen between the primary and secondary windings, clearances of basic insulation on the secondary side not less than those specified in table 16, but using the next lower step for rated impulse voltage		N
	Circuits supplied with a voltage lower than rated voltage, clearances of functional insulation are based on the working voltage used as the rated voltage in table 15		N
29.2	Creepage distances not less than those appropriate for the working voltage, taking into account the material group and the pollution degree :	(see appended table)	P
	Pollution degree 2 applies, unless		N
	- precautions taken to protect the insulation; pollution degree 1		N
	- insulation subjected to conductive pollution; pollution degree 3	pollution degree 3	P
	The microenvironment is pollution degree 3 if the insulation can be polluted by condensation from steam produced during normal use of the appliance (IEC 60335-2-15)	pollution degree 3	P
	A force of 2 N is applied to bare conductors, other than heating elements		P
	A force of 30 N is applied to accessible surfaces		P
	In a double insulation system, the working voltage for both the basic and supplementary insulation is taken as the working voltage across the complete double insulation system		N
29.2.1	Creepage distances of basic insulation not less than specified in table 17 :	(see appended table)	P

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 76 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from table 2 of IEC 60664-4, these values being used if exceeding the values in table 17 :		N
	Except for pollution degree 1, corresponding creepage distance not less than the minimum specified for the clearance in table 16, if the clearance has been checked according to the test of clause 14 :		N
29.2.2	Creepage distances of supplementary insulation at least those specified for basic insulation in table 17, or :	(see appended table)	P
	Table 2 of IEC 60664-4, as applicable :		N
29.2.3	Creepage distances of reinforced insulation at least double those specified for basic insulation in table 17, or :	(see appended table)	P
	Table 2 of IEC 60664-4, as applicable :		N
29.2.4	Creepage distances of functional insulation not less than specified in table 18 :	(see appended table)	P
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from table 2 of IEC 60664-4, these values being used if exceeding the values in table 18 :		N
	Creepage distances may be reduced if the appliance complies with clause 19 with the functional insulation short-circuited		N
29.3	Supplementary and reinforced insulation have adequate thickness, or a sufficient number of layers, to withstand the electrical stresses		P
	Compliance checked:		P
	- by measurement, in accordance with 29.3.1, or		P
	- by an electric strength test in accordance with 29.3.2, or		P
	- for insulation, other than single layer internal wiring insulation, by an assessment of the thermal quality of the material combined with an electric strength test, in accordance with 29.3.3, and		N



Report No.: CTS190809039-L	Page 77 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	for accessible parts of reinforced insulation consisting of a single layer, by measurement in accordance with 29.3.4, or		N
	- by an assessment of the thermal quality of the material according to 29.3.3 combined with an electric strength test in accordance with 23.5, for each single layer internal wiring insulation touching each other, or		N
	- as specified in subclause 6.3 of IEC 60664-4 for insulation that is subjected to any periodic voltage having a frequency exceeding 30 kHz		N
29.3.1	Supplementary insulation have a thickness of at least 1 mm		P
	Reinforced insulation have a thickness of at least 2 mm		P
29.3.2	Each layer of material withstand the electric strength test of 16.3 for supplementary insulation		N
	Supplementary insulation consist of at least 2 layers		N
	Reinforced insulation consist of at least 3 layers		N
29.3.3	The insulation is subjected to the dry heat test Bb of IEC 60068-2-2, followed by		N
	the electric strength test of 16.3		N
	If the temperature rise during the tests of clause 19 does not exceed the value specified in table 3, the test of IEC 60068-2-2 is not carried out		N
29.3.4	Thickness of accessible parts of reinforced insulation consisting of a single layer not less than specified in table 19 :		N
30	RESISTANCE TO HEAT AND FIRE		P
30.1	External parts of non-metallic material,		P
	parts supporting live parts, and		P
	parts of thermoplastic material providing supplementary or reinforced insulation		P
	sufficiently resistant to heat		P
	Ball-pressure test according to IEC 60695-10-2		P



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 78 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	External parts tested at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 75 °C, whichever is the higher; temperature (°C) :	(see appended table 30.1)	P
	Parts supporting live parts tested at 40°C plus the maximum temperature rise determined during the test of clause 11, or at 125 °C, whichever is the higher; temperature (°C) :	(see appended table 30.1)	P
	Parts of thermoplastic material providing supplementary or reinforced insulation tested at 25 °C plus the maximum temperature rise determined during clause 19, if higher; temperature (°C) :	(see appended table 30.1)	P
	For coffee makers, egg boilers, kettles and steam cookers, the temperature rises occurring during the tests of 19.4, 19.5 and 19.101 are not taken into account (IEC 60335-2-15)		N
30.2	Parts of non-metallic material resistant to ignition and spread of fire		P
	This requirement does not apply to:		N
	parts having a mass not exceeding 0,5 g, provided the cumulative effect is unlikely to propagate flames that originate inside the appliance by propagating flames from one part to another, or		N
	decorative trims, knobs and other parts unlikely to be ignited or to propagate flames that originate inside the appliance		N
	Compliance checked by the test of 30.2.1, and in addition:		N
	- for attended appliances, 30.2.2 applies		N
	- for unattended appliances, 30.2.3 applies	unattended appliance	P
	For appliances for remote operation, 30.2.3 applies		N
	For base material of printed circuit boards, 30.2.4 applies		N
	For water distillers, appliances incorporating a delayed start timer and appliances intended to maintain liquid or food at a particular temperature, 30.2.3 applies (IEC 60335-2-15)		P

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 79 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	For other appliances, 30.2.2 applies (IEC 60335-2-15:2002)		N
30.2.1	Parts of non-metallic material subjected to the glow-wire test of IEC 60695-2-11 at 550°C	(see appended table 30.2)	P
	However, test not carried out if the material is classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 550 °C, or		N
	the material is classified at least HB40 according to IEC 60695-11-10		N
	Parts for which the glow-wire test cannot be carried out need to meet the requirements in ISO 9772 for material classified HBF		N
30.2.2	Appliances operated while attended, parts of non-metallic material supporting current-carrying connections, and		N
	parts of non-metallic material within a distance of 3mm of such connections,		N
	subjected to the glow-wire test of IEC 60695-2-11 with appropriate severity level:	(see appended table 30.2)	N
	- 750 °C, for connections carrying a current exceeding 0,5 A during normal operation		N
	- 650 °C, for other connections		N
	Glow-wire applied to an interposed shielding material, if relevant		N
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least:		N
	- 750 °C, for connections carrying a current exceeding 0,5 A during normal operation		N
	- 650 °C, for other connections		N
	The glow-wire test is also not carried out on small parts. These parts are to:		N
	- comprise material having a glow-wire flammability index of at least 750 °C, or 650 °C as appropriate, or		N
	- comply with the needle-flame test of Annex E, or	(see appended table 30.2/30.4)	N
	- comprise material classified as V-0 or V-1 according to IEC 60695-11-10 :		N
	Glow-wire test not applicable to conditions as specified :		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service





# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 80 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

30.2.3	Appliances operated while unattended, tested as specified in 30.2.3.1 and 30.2.3.2		P
	The tests are not applicable to conditions as specified :		P
30.2.3.1	Parts of non-metallic material supporting connections carrying a current exceeding 0,2 A during normal operation, and		P
	parts of non-metallic material, other than small parts, within a distance of 3 mm,		P
	subjected to the glow-wire test of IEC 60695-2-11 with a test severity of 850 °C	(see appended table 30.2)	P
	Glow-wire applied to an interposed shielding material, if relevant		N
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 850 °C		N
30.2.3.2	Parts of non-metallic material supporting connections, and		P
	parts of non-metallic material within a distance of 3mm,		P
	subjected to the glow-wire test of IEC 60695-2-11 with appropriate severity level:	(see appended table 30.2)	P
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation	750 °C	P
	- 650 °C, for other connections		N
	Glow-wire applied to an interposed shielding material, if relevant		N
	However, the glow-wire test of 750 °C or 650 °C as appropriate, is not carried out on parts of material fulfilling both or either of the following classifications:		N
	- a glow-wire ignition temperature according to IEC 60695-2-13 of at least:		N
	775 °C, for connections carrying a current exceeding 0,2 A during normal operation		N
	675 °C, for other connections		N
	- a glow-wire flammability index according to IEC 60695-2-12 of at least:		N
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 81 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	- 650 °C, for other connections		N
	The glow-wire test is also not carried out on small parts. These parts are to:		N
	- comprise material having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N
	- comprise material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N
	- comply with the needle-flame test of Annex E, or		N
	- comprise material classified as V-0 or V-1 according to IEC 60695-11-10		N
	The consequential needle-flame test of Annex E applied to non-metallic parts that encroach within the vertical cylinder placed above the centre of the connection zone and on top of the non-metallic parts supporting current-carrying connections, and parts of non-metallic material within a distance of 3 mm of such connections if these parts are those:		N
	- parts that withstood the glow-wire test of IEC 60695-2-11 of 750 °C or 650 °C as appropriate, but produce a flame that persist longer than 2 s, or		N
	- parts that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N
	- small parts, that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N
	- small parts for which the needle-flame test of Annex E was applied, or		N
	- small parts for which a material classification of V-0 or V-1 was applied		N
	However, the consequential needle-flame test is not carried out on non-metallic parts, including small parts, within the cylinder that are:		N
	- parts having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N
	- parts comprising material classified as V-0 or V-1 according to IEC 60695-11-10, or		N
	- parts shielded by a flame barrier that meets the needle-flame test of Annex E or that comprises material classified as V-0 or V-1 according to IEC 60695-11-10		N



Report No.: CTS190809039-L	Page 82 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

30.2.4	Base material of printed circuit boards subjected to the needle-flame test of Annex E	(see appended table 30.2/30.4)	P
	Test not applicable to conditions as specified :		N
31	RESISTANCE TO RUSTING		P
	Relevant ferrous parts adequately protected against rusting		P
	Tests specified in part 2 when necessary		P
32	RADIATION, TOXICITY AND SIMILAR HAZARDS		P
	Appliance does not emit harmful radiation or present a toxic or similar hazard due to their operation in normal use		P
	Compliance is checked by the limits or tests specified in part 2, if relevant		P

### 3.3 Annex as stated in the standards

A	ANNEX A (INFORMATIVE) ROUTINE TESTS		N
	Description of routine tests to be carried out by the manufacturer		N
B	ANNEX B (NORMATIVE) APPLIANCES POWERED BY RECHARGEABLE BATTERIES THAT ARE RECHARGED IN THE APPLIANCE		N
	The following modifications to this standard are applicable for appliances powered by batteries that are recharged in the appliance		N
	Three forms of construction covered:		N
	a) Appliance supplied directly from the supply mains or a renewable energy source, the battery charging circuitry and other supply unit circuitry incorporated within the appliance		N
	b) The part of the appliance incorporating the battery is supplied from the supply mains or a renewable energy source, via a detachable supply unit. The battery charging circuitry is incorporated within the part of the appliance containing the battery		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

#### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 83 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	c) The part of the appliance incorporating the battery is supplied from the supply mains or a renewable energy source, via a detachable supply unit. The battery charging circuitry is incorporated within the detachable supply unit		N
3.1.9	Appliance operated under the following conditions:		N
	- the appliance, supplied by its fully charged battery, operated as specified in relevant part 2		N
	- the battery is charged, the battery being initially discharged to such an extent that the appliance cannot operate		N
	-if possible, the appliance is supplied from the supply mains through its battery charger, the battery being initially discharged to such an extent that the appliance cannot operate. The appliance is operated as specified in relevant part 2		N
	- if the appliance incorporates inductive coupling between two parts that are detachable from each other, the appliance is supplied from the supply mains with the detachable part removed		N
3.6.2	Part to be removed in order to discard the battery is not considered to be detachable		N
5.B.101	Appliances supplied from the supply mains tested as specified for motor-operated appliances		N
7.1	Battery compartment for batteries intended to be replaced by the user, marked with battery voltage (V) and polarity of the terminals :		N
	The positive terminal indicated by symbol IEC 60417-5005 and the negative terminal by symbol IEC 60417-5006		N



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 84 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Appliances intending to be supplied from a detachable supply unit marked with symbol IEC 60417-6181 and its type reference along with symbol ISO 7000-0790 (2004-01), or		N
	use only with <model designation> supply unit :		N
7.6	Additional symbols		N
7.12	The instructions give information regarding charging		N
	The instructions for appliances incorporating batteries intended to be replaced by the user includes required information		N
	Details about how to remove batteries containing materials hazardous to the environment given		N
	For appliances intending to be supplied from a detachable supply unit for the purposes of recharging the battery, the type reference of the detachable supply unit is stated along with the following:		N
	WARNING: For the purposes of recharging the battery, only use the detachable supply unit provided with this appliance		N
	If the symbol for detachable supply unit is used, its meaning is explained		N
7.15	Markings placed on the part of the appliance connected to the supply mains		N
	The type reference of the detachable supply unit is placed in close proximity to the symbol		N
8.2	Appliances having batteries that according to the instruction may be replaced by the user need only have basic insulation between live parts and the inner surface of the battery compartment		N
	If the appliance can be operated without batteries, double or reinforced insulation required		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 85 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

11.7	The battery is charged for the period stated in the instructions or 24 h :		N
11.8	Temperature rise of the battery surface does not exceed the limit in the battery manufacturer's specification; measured (K); limit (K) :		N
	If no limit specified, the temperature rise does not exceed 20 K; measured (K) :		N
19.1	Appliances subjected to tests of 19.B.101, 19.B.102 and 19.B.103		N
19.10	Not applicable		N
19.B.101	Appliances supplied at rated voltage for 168 h, the battery being continually charged		N
19.B.102	For appliances having batteries that can be removed without the aid of a tool, short-circuit of the terminals of the battery, the battery being fully charged,		N
19.B.103	Appliances having batteries replaceable by the user supplied at rated voltage under normal operation with the battery removed or in any position allowed by the construction		N
19.13	The battery does not rupture or ignite		N
21.B.101	Appliances having pins for insertion into socket-outlets have adequate mechanical strength		N
	Part of the appliance incorporating the pins subjected to the free fall test, procedure 2, of IEC 60068-2-31, the number of falls being:		N
	- 100, if the mass of the part does not exceed 250 g (g) :		N
	- 50, if the mass of the part exceeds 250 g :		N
	After the test, the requirements of 8.1, 15.1.1, 16.3 and clause 29 are met		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 86 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

22.3	Appliances having pins for insertion into socket-outlets tested as fully assembled as possible		N
25.13	An additional lining or bushing not required for interconnection cords in class III appliances or class III constructions operating at safety extra-low voltage not containing live parts		N
30.2	For parts of the appliance connected to the supply mains during the charging period, 30.2.3 applies		N
	For other parts, 30.2.2 applies		N
C	ANNEX C (NORMATIVE) AGEING TEST ON MOTORS		N
	Tests, as described, carried out when doubt with regard to the temperature classification of the insulation of a motor winding		N
	Test conditions as specified		N
	The value of p in Table C.1 is 2 000 (IEC 60335-2-15)		N
D	ANNEX D (NORMATIVE) THERMAL MOTOR PROTECTORS		N
	Applicable to appliances having motors that incorporate thermal motor protectors necessary for compliance with the standard		N
	Test conditions as specified		N
E	ANNEX E (NORMATIVE) NEEDLE-FLAME TEST		N
	Needle-flame test carried out in accordance with IEC 60695-11-5, with the following modifications:		N
7	Severities		N
	The duration of application of the test flame is 30 s $\pm$ 1 s		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 87 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

9	Test procedure	N
9.1	The specimen so arranged that the flame can be applied to a vertical or horizontal edge as shown in the examples of Figure 1	N
9.2	The first paragraph does not apply	N
	If possible, the flame is applied at least 10 mm from a corner	N
9.3	The test is carried out on one specimen	N
	If the specimen does not withstand the test, the test may be repeated on two additional specimens, both withstanding the test	N
11	Evaluation of test results	N
	The duration of burning not exceeding 30 s	N
	However, for printed circuit boards, the duration of burning not exceeding 15 s	N
F	ANNEX F (NORMATIVE) CAPACITORS	N
	Capacitors likely to be permanently subjected to the supply voltage, and used for radio interference suppression or voltage dividing, comply with the following clauses of IEC 60384-14, with the following modifications:	N
1.5	Terms and definitions	N
1.5.3	Class X capacitors tested according to subclass X2	N
1.5.4	This subclause is applicable	N
1.6	Marking	N
	Items a) and b) are applicable	N
3.4	Approval testing	N
3.4.3.2	Table 3 is applicable as described	N
4.1	Visual examination and check of dimensions	N
	This subclause is applicable	N
4.2	Electrical tests	N
4.2.1	This subclause is applicable	N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service





# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 88 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

4.2.5	This subclause is applicable		N
4.2.5.2	Only table 11 is applicable		N
	Values for test A apply		N
	However, for capacitors in heating appliances the values for test B or C apply		N
4.12	Damp heat, steady state		N
	This subclause is applicable		N
	Only insulation resistance and voltage proof are checked		N
4.13	Impulse voltage		N
	This subclause is applicable		N
4.14	Endurance		N
	Subclauses 4.14.1, 4.14.3, 4.14.4 and 4.14.7 are applicable		N
4.14.7	Only insulation resistance and voltage proof are checked		N
	No visible damage		N
4.17	Passive flammability test		N
	This subclause is applicable		N
4.18	Active flammability test		N
	This subclause is applicable		N
G	ANNEX G (NORMATIVE) SAFETY ISOLATING TRANSFORMERS		N
	The following modifications to this standard are applicable for safety isolating transformers:		N
7	Marking and instructions		N
7.1	Transformers for specific use marked with:		N
	-name, trademark or identification mark of the manufacturer or responsible vendor :		N
	-model or type reference :		N
17	Overload protection of transformers and associated circuits		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 89 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Fail-safe transformers comply with subclause 15.5 of IEC 61558-1		N
22	Construction		N
	Subclauses 19.1 and 19.1.2 of IEC 61558-2-6 are applicable		N
29	Clearances, creepage distances and solid insulation		N
29.1, 29.2, 29.3	The distances specified in items 2a, 2c and 3 in table 13 of IEC 61558-1 apply		N
	For insulated winding wires complying with subclause 19.12.3 of IEC 61558-1 there are no requirements for clearances or creepage distances		N
	For windings providing reinforced insulation, the distance specified in item 2c of table 13 of IEC 61558-1 is not assessed		N
	For safety isolating transformers subjected to periodic voltages with a frequency exceeding 30 kHz, the clearances, creepage distances and solid insulation values specified in IEC 60664-4 are applicable, if greater than the values specified in items 2a, 2c and 3 in table 13 of IEC 61558-1		N
H	ANNEX H (NORMATIVE) SWITCHES		N
	Switches comply with the following clauses of IEC 61058-1, as modified below:		N
	The tests of IEC 61058-1 carried out under the conditions occurring in the appliance		N
	Before being tested, switches are operated 20 times without load		N
8	Marking and documentation		N
	Switches are not required to be marked		N
	However, a switch that can be tested separately from the appliance marked with the manufacturer's name or trade mark and the type reference		N



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 90 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

13	Mechanism	N
	The tests may be carried out on a separate sample	N
15	Insulation resistance and dielectric strength	N
15.1	Not applicable	N
15.2	Not applicable	N
15.3	Applicable for full disconnection and micro-disconnection	N
17	Endurance	N
	Compliance is checked on three separate appliances or switches	N
	For 17.2.4.4, the number of cycles declared according to 7.1.4 is 10 000, unless	N
	otherwise specified in 24.1.3 of the relevant part 2 of IEC 60335 :	N
	Switches for operation under no load and which can be operated only by a tool, and	N
	switches operated by hand that are interlocked so that they cannot be operated under load,	N
	are not subjected to the tests	N
	However, switches without this interlock are subjected to the test of 17.2.4.4 for 100 cycles of operation	N
	Subclauses 17.2.2 and 17.2.5.2 not applicable	N
	The ambient temperature during the test is that occurring in the appliance during the test of Clause 11 in IEC 60335-1	N
	The temperature rise of the terminals not more than 30 K above the temperature rise measured in clause 11 of IEC 60335-1 (K) :	N
20	Clearances, creepage distances, solid insulation and coatings of rigid printed board assemblies	N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 91 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Clause 20 is applicable to clearances across full disconnection and micro-disconnection		N
	It is also applicable to creepage distances for functional insulation, across full disconnection and micro-disconnection, as stated in Table 24		N
I	ANNEX I (NORMATIVE) MOTORS HAVING BASIC INSULATION THAT IS INADEQUATE FOR THE RATED VOLTAGE OF THE APPLIANCE		N
	The following modifications to this standard are applicable for motors having basic insulation that is inadequate for the rated voltage of the appliance:		N
8	Protection against access to live parts		N
8.1	Metal parts of the motor are considered to be bare live parts		N
11	Heating		N
11.3	The temperature rise of the body of the motor is determined instead of the temperature rise of the windings		N
11.8	The temperature rise of the body of the motor, where in contact with insulating material, not exceeding values in table 3 for the relevant insulating material		N
16	Leakage current and electric strength		N
16.3	Insulation between live parts of the motor and its other metal parts is not subjected to the test		N
19	Abnormal operation		N
19.1	The tests of 19.7 to 19.9 are not carried out		N
19.I.101	Appliance operated at rated voltage with each of the following fault conditions:		N
	- short circuit of the terminals of the motor, including any capacitor incorporated in the motor circuit		N



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 92 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	- short circuit of each diode of the rectifier		N
	- open circuit of the supply to the motor		N
	- open circuit of any parallel resistor, the motor being in operation		N
	Only one fault simulated at a time, the tests carried out consecutively		N
22	Construction		N
22.1.101	For class I appliances incorporating a motor supplied by a rectifier circuit, the d.c. circuit being insulated from accessible parts of the appliance by double or reinforced insulation		N
	Compliance checked by the tests specified for double and reinforced insulation		N
J	ANNEX J (NORMATIVE) COATED PRINTED CIRCUIT BOARDS		N
	Testing of protective coatings of printed circuit boards carried out in accordance with IEC 60664-3 with the following modifications:		N
5.7	Conditioning of the test specimens		N
	When production samples are used, three samples of the printed circuit board are tested		N
5.7.1	Cold		N
	The test is carried out at -25 °C		N
5.7.3	Rapid change of temperature		N
	Severity 1 is specified		N
5.9	Additional tests		N
	This subclause is not applicable		N
K	ANNEX K (NORMATIVE) OVERVOLTAGE CATEGORIES		N
	The information on overvoltage categories is extracted from IEC 60664-1		N
	Overvoltage category is a numeral defining a transient overvoltage condition		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 93 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	Equipment of overvoltage category IV is for use at the origin of the installation		N
	Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements		N
	Equipment of overvoltage category II is energy consuming equipment to be supplied from the fixed installation		N
	If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies		N
	Equipment of overvoltage category I is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriate low level		N
L	ANNEX L (INFORMATIVE) GUIDANCE FOR THE MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES		P
	Information for the determination of clearances and creepage distances		P
M	ANNEX M (NORMATIVE) POLLUTION DEGREE		P
	The information on pollution degrees is extracted from IEC 60664-1		P
	Pollution		P
	The microenvironment determines the effect of pollution on the insulation, taking into account the macroenvironment		P
	Means may be provided to reduce pollution at the insulation by effective enclosures or similar		P
	Minimum clearances specified where pollution may be present in the microenvironment		P
	Degrees of pollution in the microenvironment		P

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 94 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	For evaluating creepage distances, the following degrees of pollution in the microenvironment are established:	P
	- pollution degree 1: no pollution or only dry, non-conductive pollution occurs. The pollution has no influence	N
	- pollution degree 2: only non-conductive pollution occurs, except that occasionally a temporary conductivity caused by condensation is to be expected	N
	- pollution degree 3: conductive pollution occurs or dry non-conductive pollution occurs that becomes conductive due to condensation that is to be expected	P
	- pollution degree 4: the pollution generates persistent conductivity caused by conductive dust or by rain or snow	N
N	ANNEX N (NORMATIVE) PROOF TRACKING TEST	P
	The proof tracking test is carried out in accordance with IEC 60112 with the following modifications:	P
7	Test apparatus	P
7.3	Test solutions	P
	Test solution A is used	P
10	Determination of proof tracking index (PTI)	P
10.1	Procedure	P
	The proof voltage is 100V, 175V, 400V or 600V :	175V
	The test is carried out on five specimens	P
	In case of doubt, additional test with proof voltage reduced by 25V, the number of drops increased to 100	N
10.2	Report	N
	The report states if the PTI value was based on a test using 100 drops with a test voltage of (PTI-25) V	N



Report No.: CTS190809039-L	Page 95 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

O	ANNEX O (INFORMATIVE) SELECTION AND SEQUENCE OF THE TESTS OF CLAUSE 30		P
	Description of tests for determination of resistance to heat and fire		P
P	ANNEX P (INFORMATIVE) GUIDANCE FOR THE APPLICATION OF THIS STANDARD TO APPLIANCES USED IN WARM DAMP EQUABLE CLIMATES		N
	Modifications applicable for class 0 and 01 appliances having a rated voltage exceeding 150V, intended to be used in countries having a warm damp equable climate and that are marked WDaE		N
	Modifications may also be applied to class 1 appliances having a rated voltage exceeding 150V, intended to be used in countries having a warm damp equable climate and that are marked WDaE, if liable to be connected to a supply mains that excludes the protective earthing conductor		N
5.7	The ambient temperature for the tests of clauses 11 and 13 is 40 +3/0 °C		N
7.1	The appliance marked with the letters WDaE		N
7.12	The instructions state that the appliance is to be supplied through a residual current device (RCD) having a rated residual operating current not exceeding 30 mA		N
	The instructions state that the appliance is considered to be suitable for use in countries having a warm damp equable climate, but may also be used in other countries		N
11.8	The values of Table 3 are reduced by 15 K		N
13.2	The leakage current for class I appliances not exceeding 0,5 mA		N
15.3	The value of t is 37 °C		N
16.2	The leakage current for class I appliances not exceeding 0,5 mA (mA):		N
19.13	The leakage current test of 16.2 is applied in addition to the electric strength test of 16.3		N





Report No.: CTS190809039-L	Page 96 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

Q	ANNEX Q (INFORMATIVE) SEQUENCE OF TESTS FOR THE EVALUATION OF ELECTRONIC CIRCUITS		N
	Description of tests for appliances incorporating electronic circuits		N
R	ANNEX R (NORMATIVE) SOFTWARE EVALUATION		N
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 validated in accordance with the requirements of this annex		N
R.1	Programmable electronic circuits using software		N
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 constructed so that the software does not impair compliance with the requirements of this standard		
R.2	Requirements for the architecture		N
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 use measures to control and avoid software-related faults/errors in safety-related data and safety-related segments of the software		N
R.2.1.1	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.2 have one of the following structures:		N
	- single channel with periodic self-test and monitoring		N
	- dual channel (homogenous) with comparison		N
	- dual channel (diverse) with comparison		N
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 have one of the following structures:		N



Report No.: CTS190809039-L	Page 97 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

	- single channel with functional test		N
	- single channel with periodic self-test		N
	- dual channel without comparison		N
R.2.2	Measures to control faults/errors		N
R.2.2.1	When redundant memory with comparison is provided on two areas of the same component, the data in one area is stored in a different format from that in the other area		N
R.2.2.2	Programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.2 and that use dual channel structures with comparison, have additional fault/error detection means for any fault/errors not detected by the comparison		N
R.2.2.3	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, means are provided for the recognition and control of errors in transmissions to external safety-related data paths		N
R.2.2.4	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the programmable electronic circuits incorporate measures to address the fault/errors in safety-related segments and data indicated in table R.1 and R.2 as appropriate		N
R.2.2.5	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, detection of a fault/error occur before compliance with clause 19 is impaired		N



Report No.: CTS190809039-L	Page 98 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

R.2.2.6	The software is referenced to relevant parts of the operating sequence and the associated hardware functions		N
R.2.2.7	Labels used for memory locations are unique		N
R.2.2.8	The software is protected from user alteration of safety-related segments and data		N
R.2.2.9	Software and safety-related hardware under its control is initialized and terminates before compliance with clause 19 is impaired		N
R.3	Measures to avoid errors		N
R.3.1	General		N
	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the following measures to avoid systematic fault in the software are applied		N
	Software that incorporates measures used to control the fault/error conditions specified in table R.2 is inherently acceptable for software required to control the fault/error conditions specified in table R.1		N
R.3.2	Specification		N
R.3.2.1	Software safety requirements:	Software Id:	N
	The specification of the software safety requirements includes the descriptions listed		N
R.3.2.2	Software architecture		N



Report No.: CTS190809039-L	Page 99 of 126	Date: 10 September 2019
----------------------------	----------------	-------------------------

R.3.2.2.1	The specification of the software architecture includes the aspects listed - techniques and measures to control software faults/errors (refer to R.2.2); - interactions between hardware and software; - partitioning into modules and their allocation to the specified safety functions; - hierarchy and call structure of the modules (control flow); - interrupt handling; - data flow and restrictions on data access; - architecture and storage of data; - time-based dependencies of sequences and data	Document ref. No:	N
R.3.2.2.2	The architecture specification is validated against the specification of the software safety requirements by static analysis		N
R.3.2.3	Module design and coding		N
R.3.2.3.1	Based on the architecture design, software is suitably refined into modules		N
	Software module design and coding is implemented in a way that is traceable to the software architecture and requirements		N
R.3.2.3.2	Software code is structured		N
R.3.2.3.3	Coded software is validated against the module specification by static analysis		N
	The module specification is validated against the architecture specification by static analysis		N
R.3.3.3	Software validation		N
	The software is validated with reference to the requirements of the software safety requirements specification		N
	Compliance is checked by simulation of:		N



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 100 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

	- input signals present during normal operation		N
	- anticipated occurrences		N
	- undesired conditions requiring system action		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Complaint line: +86-574-87908003

Fax: +86-574-87907993

E-mail: [cts@cts-lab.com](mailto:cts@cts-lab.com)

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 101 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

## 3.4 Tables

10.1	TABLE: Power input deviation					P
Input deviation of/at:		P rated (W)	P measured (W)	dP	Required dP	Remark
220V~ 50Hz		860	875,68	+1,82%	+5%, -10%	Highest setting
220V~ 60Hz		860	874,96	+1,74%	+5%, -10%	Highest setting
240V~ 50Hz		1020	1042,14	+2,17%	+5%, -10%	Highest setting
240V~ 60Hz		1020	1041,89	+2,15%	+5%, -10%	Highest setting

10.2	TABLE: Current deviation					N
Current deviation of/at:		I rated (A)	I measured (A)	dI	Required dI	Remark
---		---	---	---	---	---

11.8	TABLE: Heating test, thermocouples		P
	Test voltage (V) .....	256,65V(1173W)	—
	Ambient, t <sub>1</sub> (°C).....:	24,1	
	Ambient, t <sub>2</sub> (°C).....:	24,3	—
Thermocouple locations		dT (K)	Max. dT (K)
Power cord with inlet		10,4	50
Internal wire		84,1	T200-25=175
Plastic enclosure inside		23,1	For cl30.1
Plastic enclosure		15,8	65
Coated Metal surface		14,6	55
Handle		8,1	60
Test corner		6,9	65
PCB		18,7	120
Winding of T1		34,1	85
Relay		17,9	T85-25=60



Report No.: CTS190809039-L	Page 102 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

11.8	TABLE: Heating test, resistance method					N
	Test voltage (V) .....	:	---			---
	Ambient, $t_1$ (°C) .....	:	---			---
	Ambient, $t_2$ (°C) .....	:	---			---
Temperature rise of winding		$R_1$ ( $\Omega$ )	$R_2$ ( $\Omega$ )	dT (K)	Max. dT (K)	Insulation class
---		---	---	---	---	---

13.2	TABLE: Leakage current					P
	Heating appliances: 1.15 x rated input .....	:	256,65V(1173W)			---
	Motor-operated and combined appliances: 1.06 x rated voltage .....	:	---			---
Leakage current between			I (mA)	Max. allowed I (mA)		
Live part and earthed metal enclosure			0,105	0,75		
Live part and plastic enclosure			0,025	0,35		

13.3	TABLE: Electric strength					P
Test voltage applied between:			Voltage (V)	Breakdown (Yes/No)		
Live part and earthed metal enclosure			1000	No		
Live part and plastic enclosure			3000	No		

14	TABLE: Transient overvoltages					N
Clearance between:		CI (mm)	Required CI (mm)	Rated impulse voltage (V)	Impulse test voltage (V)	Flashover (Yes/No)
---		---	---	---	---	---



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 103 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

16.2	TABLE: Leakage current		P
	Single phase appliances: 1.06 x rated voltage .....	240x1,06=254,4V	—
	Three phase appliances 1.06 x rated voltage divided by $\sqrt{3}$ : .....	---	—
Leakage current between		I (mA)	Max. allowed I (mA)
Live part and earthed metal enclosure		0,145	0,75
Live part and plastic enclosure		0,040	0,25

16.3	TABLE: Electric strength		P
Test voltage applied between:		Voltage (V)	Breakdown (Yes/No)
Live part and earthed metal enclosure		1250	No
Live part and plastic enclosure		3000	No

17	TABLE: Overload protection, temperature rise		N
Temperature rise of part/at:		dT (K)	Max. dT (K)
---		---	---

19.3	TABLE: Abnormal operation, temperature rises		P
Temperature rise of part/at:		dT (K)	Max. dT (K)
Power cord with inlet		11,8	150
Test corner		14,7	150
Plastic enclosure inside		28,6	For cl30.1
Ta		24,4	---

19.7	TABLE: Abnormal operation, locked rotor/moving parts					N
	Test voltage (V) .....		---			—
	Ambient, $t_1$ (°C) .....		---			—
	Ambient, $t_2$ (°C) .....		---			—
Temperature of winding		$R_1$ ( $\Omega$ )	$R_2$ ( $\Omega$ )	dT (K)	T (°C)	Max. T (°C)
---		---	---	---	---	---

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Complaint line: +86-574-87908003

Fax: +86-574-87907993

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service





# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 104 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

19.9	TABLE: Abnormal operation, running overload					N
	Test voltage (V) .....		---			---
	Ambient, $t_1$ (°C) .....		---			---
	Ambient, $t_2$ (°C) .....		---			---
Temperature of winding		$R_1$ (Ω)	$R_2$ (Ω)	dT (K)	T (°C)	Max. T (°C)
---		---	---	---	---	---

19.13	TABLE: Abnormal operation,		P
Test voltage applied between:		Voltage (V)	Breakdown (Yes/No)
Live part and earthed metal enclosure		1000	No
Live part and plastic enclosure		3000	No

24.1	TABLE: Components					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity	
Power cord	Zhongshan Lifutai Electrical Co., Ltd.	H05VV-F	3G 0,75 mm <sup>2</sup>	EN 50525-2-11 60227 IEC 53	VDE 40006837	
Alternative	Ningbo Qiaopu Electric Co., Ltd	H05VV-F	3G 0,75 mm <sup>2</sup>	EN 50525-2-11 60227 IEC 53	VDE 40035976	
Alternative	Shunde Wangsheng Electric Co., Ltd	H05VV-F	3G 0,75 mm <sup>2</sup>	EN 50525-2-11 60227 IEC 53	VDE 40009866	
Alternative	Sheng Yi Electrical Factory	H05VV-F	3G 0,75 mm <sup>2</sup>	EN 50525-2-11 60227 IEC 53	VDE 40023272	
insulation tube	Terminal tube Nissei Electric Co.,Ltd.	ESG-1U	T200, 600V	UL	UL E65966	
Internal wire	Foshan City Shunde Zhenglang Metalware Electric Apparatus Co Ltd	Style 3122	200° C 300 V 18-26AWG	EN 60335-1 EN 60335-2-15 UL758	Tested with Appliance UL E313243	
Alternative	NIZING ELECTRIC CO LTD	Style 3122	200° C 300 V 18-26AWG	EN 60335-1 EN 60335-2-15 UL758	Tested with Appliance UL E215834	
Alternative	Shenzhen Mysun Insulation Materials Co Ltd.	Style 3122	200° C 300 V 18-26AWG	EN 60335-1 EN 60335-2-15 UL758	Tested with Appliance UL E239689	

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 105 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

Alternative	Jiangyin Tiancheng Electronic & Electric Wire Co., Ltd	Style 3122	200° C 300 V 18-26AWG	EN 60335-1 EN 60335-2-15 UL758	Tested with Appliance UL E332921
Plug	Zhongshan Lifutai Electrical Co., Ltd.	LFP-001	250 V, 16 A	DIN VDE 0620-1 IEC/TR 60083	VDE 40007386
Alternative	Ningbo Qiaopu Electric Co., Ltd	D03	250 V, 16 A	DIN VDE 0620-1 IEC/TR 60083	VDE 40002872
Alternative	Sheng Yi Electrical Factory	SY-22	250 V, 16 A	DIN VDE 0620-1 IEC/TR 60083	VDE 40007744
BS PLUG	Dongguan Ubill Electrical Co., Ltd	UBL 8008; AP-411A; QL-341	250V 13A	BS1363-1 IEC 60083	ASTA 1183
heating element	GUANGDONG ENAITER ELECTRICAL APPLIANCES CO.,LTD	---	220-240 V, 860-1020W	EN 60335-1 EN 60335-2-15	Tested with appliance
Appliance inlet	Shunde Wansheng Electrical Co., Ltd	WS-C310	250 V, 10 A	IEC/EN 60320-1	VDE 40010737
Alternative	Steady Electronics Corporation	2107 2111	250 V, 10 A	IEC/EN 60320-1	VDE 40011923
Alternative	ZHE JIANG BEI ER JIA Electronic Co., Ltd.	ST-A01-001L ST-A01-002L ST-A01-003J ST-A01-003K	250V 10A	IEC/EN 60320-1	VDE 40013388
plastic enclosure	Super-Dragon Engineering Plastics Co., Ltd.	PP-FG130 PPH20	PP	EN 60335-1 EN 60335-2-15 UL	Tested with appliance E201164
Relay	DongGuan YongNeng Electronics Co.,Ltd	YX202-S-112DM	250V 10A T85	IEC/EN 60810-1	TUV R50106730
Alternative	Zhejiang Meishuo Electric Technology Co.,LTD	MPA-S-112-A	250V 10A T85	IEC/EN 60810-1	TUV Rh R50184948
Alternative	Ningbo Tianbo Ganglian Electronics CO.,LTD	HJR-3FF-S-H	250V 10A T85	IEC/EN 60810-1	TUV Rh R50116163

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 106 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

Alternative	DONGGUAN SANYOU ELECTRICAL APPLIANCES CO., LTD.	SRD-S-112DM	250V 10A T85	IEC/EN 60810-1	VDE 40034479
Varistor	Fenghua Adv. Tech. (Holding) Co., Ltd.	FNR	10K471, T85	DIN EN 61051-1 IEC 61051-1 IEC 61051-2 IEC 61051-2-2	VDE 40008242
Alternative	GUANGXI NEW FUTURE INFORMATION INDUSTRY CO., LTD	NF	10K471,T85	DIN EN 61051-1 IEC 61051-1 IEC 61051-2 IEC 61051-2-2	VDE 40030322
Alternative	Huizhou Songlong Xindian Electronic Technology Co.,LTD	VDR	10K471,T85	DIN EN 61051-1 IEC 61051-1 IEC 61051-2 IEC 61051-2-2	VDE 40040037
PCB	Kingboard Laminates Holdings Ltd	KB-5150	94 V-0 Thickness:1.6mm	EN 60335-1 EN 60335-2-15 UL 94	VDE 40040433 Tested with appliance
Alternative	Shandong Jinbao Electronics Co., Ltd.	ZD-95(G)F	94 V-0 Thickness:1.6mm	EN 60335-1 EN 60335-2-15 UL 94	VDE 40032178 Tested with appliance
Alternative	SHANDONG JINBAO ELECTRONICS CO LTD	ZD-98F	94V-0	EN 60335-1 EN 60335-2-15 UL 94	Tested with Appliance UL E141940
insulation grade of winding T1	NINGBO JINTIAN NEW MATERIAL CO LTD	xUEW/130	CLASS 130	UL 1446	UL E227047
insulation tape	JINGJIANG FUWEI ADHESIVE PRODUCT CO.,LTD	JY25-A(b)	130°C	UL 510A	UL E165111
NTC	SHENZHEN AMPRON TECHNOLOGY CO LTD	MF58-503F3950FA	50K(T=25°C)	UL	E243011

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 107 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

Thermal link	A R ELECTRIC CO LTD	F00216C	216°C 250 V, 10 A,	IEC/EN 60691	TUV Rh R50415424
Alternative	Foshan Shunde Jinyu Electrical Co., Ltd	JY216A	216°C 250 V, 10 A,	IEC/EN 60691	TUV Rh R50209412
Alternative	NEC Schott Components Corporation	SF214E	216°C 250 V, 10 A,	IEC/EN 60691	VDE 40006568
Alternative	Emerson Electric (Shenzhen)co.,ltd	G4A00 250V 10A	216°C 250 V, 10 A,	IEC/EN 60691	VDE 40017228

<sup>1)</sup> An asterisk indicates a mark which assures the agreed level of surveillance

28.1	TABLE: Threaded part torque test			P
Threaded part identification	Diameter of thread (mm)	Column number (I, II, or III)	Applied torque ( Nm )	
Fixing screw	2,93	II	0,5	

29.1	TABLE: Clearances					P
	Overvoltage category.... ..... ..... :	overvoltage category II				—
		Type of insulation:				
Rated impulse voltage (V):	Min. cl (mm)	Basic	Functional	Supplementary	Reinforced	Verdict / Remark
330	0,5*	---	---	---	---	N
500	0,5*	---	---	---	---	N
800	0,5*	---	---	---	---	N
1 500	0,5**	---	---	---	---	N
2 500	1,5**	4,2mm	3,30 mm	>8,60 mm	---	P
4 000	3,0**	---	---	---	>8,84 mm	P
6 000	5,5**	---	---	---	---	N
8 000	8,0**	---	---	---	---	N
10 000	11,0**	---	---	---	---	N

\*) The value is increased to 0,8mm for pollution degree 3

\*) If the construction is affected by wear, distortion, movement of the parts or during assembly, the value is increased by 0,5 mm

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Complaint line: +86-574-87908003

Fax: +86-574-87907993

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 108 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

29.2	TABLE: Creepage distances, basic, supplementary and reinforced insulation										P
Working voltage (V)	Creepage distance (mm) Pollution degree										
	1	2			3			Type of insulation			
		Material group			Material group						
		I	II	IIIa/IIIb	I	II	IIIa/IIIb	B <sup>*)</sup>	S <sup>*)</sup>	R <sup>*)</sup>	Verdict
≤50	0,2	0,6	0,9	1,2	1,5	1,7	1,9	—	—	—	N
≤50	0,2	0,6	0,9	1,2	1,5	1,7	1,9	—	—	—	N
≤50	0,4	1,2	1,8	2,4	3,0	3,4	3,8	—	—	—	N
>50 and ≤125	0,3	0,8	1,1	1,5	1,9	2,1	2,4	—	—	—	N
>50 and ≤125	0,3	0,8	1,1	1,5	1,9	2,1	2,4	—	—	—	N
>50 and ≤125	0,6	1,6	2,2	3,0	3,8	4,2	4,8	—	—	—	N
>125 and ≤250	0,6	1,3	1,8	2,5	3,2	3,6	4,0	—	—	—	N
>125 and ≤250	0,6	1,3	1,8	2,5	3,2	3,6	<b>4,0</b>	4,2	>8,6	—	P
>125 and ≤250	1,2	2,6	3,6	5,0	6,4	7,2	<b>8,0</b>	—	—	>8,8 4	P
>250 and ≤400	1,0	2,0	2,8	4,0	5,0	5,6	6,3	—	—	—	N
>250 and ≤400	1,0	2,0	2,8	4,0	5,0	5,6	6,3	—	—	—	N
>250 and ≤400	2,0	4,0	5,6	8,0	10,0	11,2	12,6	—	—	—	N
>400 and ≤500	1,3	2,5	3,6	5,0	6,3	7,1	8,0	—	—	—	N
>400 and ≤500	1,3	2,5	3,6	5,0	6,3	7,1	8,0	—	—	—	N
>400 and ≤500	2,6	5,0	7,2	10,0	12,6	14,2	16,0	—	—	—	N
>500 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	—	—	—	N
>500 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	—	—	—	N
>500 and ≤800	3,6	6,4	9,0	12,6	16,0	18,0	20,0	—	—	—	N
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	—	—	—	N
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	—	—	—	N
>800 and ≤1000	4,8	8,0	11,2	16,0	20,0	22,0	25,0	—	—	—	N
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	—	—	—	N
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	—	—	—	N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Complaint line: +86-574-87908003

Fax: +86-574-87907993

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 109 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

>1000 and ≤1250	6,4	10,0	14,2	20,0	25,0	28,0	32,0	—	—	—	N
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	—	—	—	N
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	—	—	—	N
>1250 and ≤1600	8,4	12,6	18,0	25,0	32,0	36,0	40,0	—	—	—	N
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	—	—	—	N
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	—	—	—	N
>1600 and ≤2000	11,2	16,0	22,0	32,0	40,0	44,0	50,0	—	—	—	N
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	—	—	—	N
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	—	—	—	N
>2000 and ≤2500	15,0	20,0	28,0	40,0	50,0	56,0	64,0	—	—	—	N
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	—	—	—	N
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	—	—	—	N
>2500 and ≤3200	20,0	25,0	36,0	50,0	64,0	72,0	80,0	—	—	—	N
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	—	—	—	N
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	—	—	—	N
>3200 and ≤4000	25,0	32,0	44,0	64,0	80,0	90,0	100,0	—	—	---	N
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	—	—	—	N
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	—	—	—	N
>4000 and ≤5000	32,0	40,0	56,0	80,0	100,0	112,0	126,0	—	—	—	N
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	—	—	—	N
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	—	—	—	N
>5000 and ≤6300	40,0	50,0	72,0	100,0	126,0	142,0	160,0	—	—	—	N
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	—	—	—	N
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	—	—	—	N
>6300 and ≤8000	50,0	64,0	90,0	126,0	160,0	180,0	200,0	—	—	—	N
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	—	—	—	N
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	—	—	—	N
>8000 and ≤10000	64,0	80,0	112,0	160,0	200,0	220,0	250,0	—	—	—	N
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	—	—	—	N
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	—	—	—	N
>10000 and ≤12500	80,0	100,0	142,0	200,0	250,0	280,0	320,0	—	—	—	N

\*, B=Basic, S=Supplementary and R=Reinforced

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 110 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

29.2	TABLE: Creepage distances, functional insulation							P
Working voltage (V)	Creepage distance (mm) Pollution degree							
	1	2			3			
		Material group			Material group			
		I	II	IIIa/IIIb	I	II	IIIa/IIIb	Verdict / Remark
≤50	0,2	0,6	0,8	1,1	1,4	1,6	1,8	N
>50 and ≤125	0,3	0,7	1,0	1,4	1,8	2,0	2,2	N
>125 and ≤250	0,4	1,0	1,4	2,0	2,5	2,8	<b>3,2</b>	P(3,30mm)
>250 and ≤400	0,8	1,6	2,2	3,2	4,0	4,5	5,0	N
>400 and ≤500	1,0	2,0	2,8	4,0	5,0	5,6	6,3	N
>500 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	N
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	N
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	N
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	N
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	N
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	N
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	N
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	N
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	N
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	N
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	N
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	N
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Complaint line: +86-574-87908003

Fax: +86-574-87907993

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 111 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

30.1	TABLE: Ball pressure			P
Part	Test temperature (°C)	Impression diameter (mm)	Allowed impression diameter (mm)	
Enclosure plastic	75	1,3	2,0	
PCB	125	1,1	2,0	
Inlet material	125	1,2	2,0	

30.2	TABLE: Glow wire test		P
Part	Test temperature (°C )	Verdict	
Enclosure plastic	650	P	
PCB	750/850	P	
Inlet material	750/850	P	

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Complaint line: +86-574-87908003

Fax: +86-574-87907993

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service





Report No.: CTS190809039-L	Page 112 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

## 3.5 Appendix

ATTACHMENT TO TEST REPORT IEC 60335-2-15 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES	
Household and similar electrical appliances – Safety – Part 2-15: Particular requirements for appliances for heating liquids	
Differences according to	: EN 60335-2-15:2016+A11:2018 used in conjunction with EN 60335-1:2012+A11:2014+A13 EN 62233:2008
Attachment Form No. :	EU_GD_IEC60335_2_15F
Attachment Originator	: LCIE
Master Attachment	: 2019-01
Copyright © 2014 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.	

	CENELEC COMMON MODIFICATIONS		
6.1	Delete “class 0” and “class 01”		P
	class I, class II, class III. (EN 60335-2-15)	class I	P
6.2	Wash boilers and livestock feed boilers shall be at least IPX3. (EN 60335-2-15)		N
7.1	Single-phase appliances to be connected to the supply mains: 230 V covered	230 V covered	P
	Multi-phase appliances to be connected to the supply mains: 400 V covered		N
	Appliances intended to be partially immersed in water for cleaning shall be marked with the maximum level of immersion (EN 60335-2-15)		N
7.6	[symbol IEC 60417-5041] Caution, hot surface (EN 60335-2-15)		N
7.10	The accessible switch required by 22.40 distinguished from other manual devices by means of shape, or size, or surface texture, or position, etc. (EN 60335-2-15)		N
	An indication that the device has been operated is given by:		—
	• a tactile feedback, or		N
	• an audible and visual feedback		N
	A selector switch with an off-position clearly identifiable is allowed (EN 60335-2-15)		N



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 113 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

	An ON/OFF switch, if any, is considered a suitable device to stop operational functions (EN 60335-2-15)		N
	A plug is not considered a suitable device to stop operational functions, as it can be difficult to be reached by vulnerable persons (EN 60335-2-15)		P
7.12	The instructions include the substance of the following:		—
	- this appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved		P
	- children shall not play with the appliance		P
	- cleaning and user maintenance shall not be made by children without supervision		P
	This appliance is intended to be used in household and similar applications such as: (EN 60335-2-15)		P
	– staff kitchen areas in shops, offices and other working environments; – farm houses; – by clients in hotels, motels and other residential type environments; – bed and breakfast type environments. (EN 60335-2-15)		P
	The instructions for kettles filled through a lid aperture situated below the handle shall include the substance of the following: (EN 60335-2-15)		N
	– WARNING: Do not remove the lid while the water is boiling. – CAUTION: Position the lid so that steam is directed away from the handle. (EN 60335-2-15)		N
	If the appliance and stand of cordless appliances can be lifted together by gripping the handle of the appliance, the instructions shall include the substance of the following: (EN 60335-2-15)		—
	CAUTION: Insure that the appliance is switched off before removing it from its stand (EN 60335-2-15)		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 114 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

	The instructions for all appliances shall include: (EN 60335-2-15)		N
	– a warning to avoid spillage on the connector – details on how to clean the surfaces in contact with food – a warning of potential injury from misuse – a statement that the heating element surface is subject to residual heat after use. (EN 60335-2-15)		N
7.12.Z1	The specific instructions related to the safe operation of this appliance is collated together in the front section of the user instructions		P
	The height of the characters, measured on the capital letters, is at least 3 mm		P
	These instructions are also available in an alternative format, e.g. on a website		P
7.14	The height of symbol IEC 60417-5041 shall be at least 8 mm. (EN 60335-2-15)		N
8.1.1	Also test probe 18 of EN 61032 is applied		P
	The appliance being in every possible position during the test		P
	The force on the probe in the straight position is increased to 10 N when probe 18 is used		P
	When using test probe 18 the appliance is fully assembled as in normal use without any parts removed, and		P
	parts intended to be removed for user maintenance are also not removed		P
8.1.2	NOTE 101 Connecting devices in stands of cordless appliances are not considered to be socket-outlets. (EN 60335-2-15)		N
8.2	Compliance is checked by applying the test probes of EN 61032		P
	For built-in appliances and fixed appliances, the test probe B and probe 18 of EN 61032 are applied only after installation		N
11.3	NOTE 101 If the magnetic field of an induction rice cooker unduly influences the results, the temperature rises can be determined using platinum resistances with twisted connecting wires or any equivalent means. (EN 60335-2-15)		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 115 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

	flat surfaces, temperature rises of the accessible front surface are measured using the probe of Figure Z101. (EN 60335-2-15)		P
11.4	If the temperature rise limits are exceeded in appliances incorporating motors, transformers or electronic circuits, and if the power input is lower than the rated power input, the test is repeated with the appliance supplied at 1,06 times the rated voltage. (EN 60335-2-15)		N
11.6	Combined appliances are operated as heating appliances. (EN 60335-2-15)		N
11.7	Appliances are operated for the duration specified in 11.7.101 to 11.7.105. (EN 60335-2-15)		P
11.8	Replace the first paragraph of Part 1 by the following: "During the test, the temperature rises measured with thermocouples (EN 60335-2-15)		P
	Add the following Table Z101 (EN 60335-2-15)		P
11.Z101	steam cookers, pressure cookers, wash boilers, rice cookers, glue pots with a water jacket, livestock feed boilers, sterilizers, soy milk makers, tea makers, kettles and other appliances (EN 60335-2-15)	rice cookers	P
11.Z102	For feeding-bottle heaters and yoghurt makers the temperature rise limits in Table Z101 apply. (EN 60335-2-15)		N
15.1.2	Appliances with an automatic cord reel tested with the cord in the most unfavourable position so that the reeling of the wet cord may affect electrical insulation during operation, the cord not being dried before reeling		N
15.2	The test is only carried out with the appliance connector in position. (EN 60335-2-15)		P
19.1	Kettles are not subjected to the test of 19.2. (EN 60335-2-15)		N
20.2	When using the test probe similar to test probe B with a circular stop face, the accessories and detachable covers are removed		P
	Test probe 18 applied with a force of 2,5N on the appliance fully assembled		P
20.101	The container and cutting blades of soy milk makers shall have adequate mechanical strength. (EN 60335-2-15)		—

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 116 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

20.102	The rotating parts of soy milk makers shall be secured so that they do not become loose during operation. (EN 60335-2-15)		N
20.103	The lid interlock, if any, of soy milk makers shall be constructed so that accidental operation of the appliance is prevented. Lid interlock switches shall be biased-off switches (EN 60335-2-15)		N
21.1	Breakage of glass parts is neglected provided that compliance with 8.1, 15.1 and 15.101 is not impaired. (EN 60335-2-15)		N
22.6	Drain holes shall be at least 5 mm in diameter or 20 mm <sup>2</sup> in area with a width of at least 3 mm. (EN 60335-2-15)		N
22.7	Espresso coffee-makers are filled with water to their rated capacity and operated at rated power input with the coffee filter blocked and any valve for the supply of steam closed. (EN 60335-2-15)		N
24.1	Components comply with the safety requirements specified in the relevant standards as far as they reasonably apply		P
	The requirements of Clause 29 of this standard apply between live parts of components and accessible parts of the appliance.		P
	The requirements of 30.2 of this standard apply to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections inside components		P
	Components that have not been previously tested or do not comply with the standard for the relevant component are tested according to the requirements of 30.2		P
	Components that have been previously tested and shown to comply with the resistance to fire requirements in the standard for the relevant component need not be retested provided that:		—
	- the severity specified in the component standard is not less than the severity specified in 30.2, and		P
	- the test report for the component states whether it complied with the standard for the relevant component with or without flame, flames not exceeding 2 s during the test are ignored		P
	Unless components have been previously tested and found to comply with the relevant standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		P

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 117 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

	For components mentioned in 24.1.1 to 24.1.9, no additional tests specified in the relevant standard for the component are necessary other than those specified in 24.1.1 to 24.1.9		P
	Components that have not been separately tested and found to comply with the relevant standard, and		P
	components that are not marked or not used in accordance with their marking,		N
	are tested in accordance with the conditions occurring in the appliance, the number of samples being that required by the relevant standard		
	Lamp holders and starter holders that have not been previously tested and found to comply with the relevant standard are tested as a part of the appliance and additionally comply with the gauging and interchangeability requirements of the relevant standard under the conditions occurring in the appliance		N
	Where the relevant standard specifies these gauging and interchangeability requirements at elevated temperatures, the temperatures measured during the tests of Clause 11 are used		N
	Plugs and socket-outlets and other connecting devices of interconnection cords are not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1, or		P
	with connectors and appliance inlets complying with the standard sheets of IEC 60320-1,		N
	if direct supply to these parts from the supply mains gives rise to a hazard		N
24.1.7	If the remote operation of the appliance is via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is EN 41003		N
	Compliance with Clause 8 of this standard is not impaired by connecting the appliance to a device covered by EN 41003		N
24.Z1	For motor running capacitors (IEC 60252-1 type P2) with a metallic enclosure having an overpressure fuse the flame testing of internal plastic parts supporting current carrying connections as required in 30.2.2 and 30.2.3.1 is not necessary		N
25.1	Appliances incorporating an appliance inlet, other than those standardized in IEC 60320-1, shall be supplied with a cord set. (EN 60335-2-15)		P

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 118 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

25.6	Supply cords of single-phase portable appliances having a rated current not exceeding 16 A, fitted with a plug complying with the following standard sheets of IEC/TR 60083:	—
	- for Class I appliances: standard sheet C2b, C3b or C4..... :	P
	- for Class II appliances: standard sheet C5 or C6..... :	N
25.7	Rubber sheathed cords (60245 IEC 53) are not suitable for appliances intended to be used outdoors or when they are liable to be exposed to significant amount of ultraviolet radiation	N
	Halogen-free thermoplastic compound sheathed supply cords have properties at least those of:	—
	<ul style="list-style-type: none"> <li>halogen-free thermoplastic compound sheathed cords (H03Z1Z1H2-F or H03Z1Z1-F), for appliances having a mass not exceeding 3 kg</li> </ul>	N
	<ul style="list-style-type: none"> <li>halogen-free thermoplastic compound sheathed cords (H05Z1Z1H2-F or H05Z1Z1-F), for other appliances</li> </ul>	N
	Cross-linked halogen-free compound sheathed supply cords have properties at least those of cross-linked halogen-free compound sheathed cords (H07ZZ-F)	N
26.11	Conductors connected by soldering are not considered to be positioned or fixed so that reliance is not placed upon the soldering alone to maintain them in position unless they are held in place near the terminals independently of the solder	N
29.3.Z1	Appliance constructed so that if there is a possibility of damaging the insulation during installation, the insulation withstands the scratch and penetration test of 21.2	N
32	Compliance regarding electromagnetic fields is checked according to EN 62233	P
Annex I, 19.1.101	The appliance is supplied at rated voltage and operated under normal operation with each of the fault conditions specified	N
	The duration of the test is as specified in 19.7	N

<b>ZA</b>	<b>ANNEX ZA (NORMATIVE) SPECIAL NATIONAL CONDITIONS</b>	<b>N</b>

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 119 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

	<b>Norway</b>		
19.5	The test is also applicable to appliances intended to be permanently connected to fixed wiring		N
	<b>Norway</b>		
22.2	The second paragraph of this subclause, dealing with single-phase, permanently connected class I appliances having heating elements, is not applicable due to the supply system		N
	<b>All CENELEC countries</b>		
25.6 and 25.25	Information concerning National plug and socket-outlets is available from the CENELEC website. Normative national requirements concerning plug and socket-outlets are shown in the relevant National standard		P
	<b>Ireland and United Kingdom</b>		
25.8	In the table, the lines for 10 A and 16 A are replaced by:		—
	> 10 and ≤ 13 1,25		N
	> 13 and ≤ 16 1,5		N
<b>ZB</b>	<b>ANNEX ZB (INFORMATIVE) A-DEVIATIONS</b>		N
	<b>Ireland</b>		
25.6	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs complying with I.S. 401:1997, or equivalent, to be fitted to domestic appliances		N
	<b>United Kingdom</b>		
25.6	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs to BS 1363 to be fitted to domestic appliances. It also allows plugs to BS 4573 and EN 50075 to be fitted to shavers and toothbrushes		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

**Centre of Testing Service**

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service





Report No.: CTS190809039-L	Page 120 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

<b>ZC</b>	<b>ANNEX ZC (NORMATIVE)</b> <b>NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS</b>	P
	A list of referenced documents in this standard	P
<b>ZD</b>	<b>ANNEX ZD (INFORMATIVE)</b> <b>IEC and CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS</b>	P
	A table with IEC and CENELEC code designations for flexible cords	P
<b>ZE</b>	<b>ANNEX ZE (INFORMATIVE)</b> <b>SPECIFIC ADDITIONAL REQUIREMENTS FOR APPLIANCES AND MACHINES INTENDED FOR COMMERCIAL USE</b>	N
7.1	Business name and full address of the manufacturer and, where applicable, his authorized representative.....:	N
	Model or type reference .....	N
	Serial number, if any .....	N
	Production year	N
	Designation of the appliance.....:	N
7.12	Instructions provided with the appliance so that the appliance can be used safely	N
	The instructions contain at least the following information:	—
	- the business name and full address of the manufacturer and, where applicable, his authorized representative	N
	- model or type reference of the appliance as marked on the appliance itself, except for the serial number	N
	- the designation of the appliance together with its explanation in case it is given by a combination of letters and/or numbers	N
	- the general description of the appliance, when needed due to the complexity of the appliance	N
	- specific precautions if required during installation, operation, adjusting, user maintenance, cleaning, repairing or moving	N
	- when needed drawings, diagrams, descriptions and explanations necessary for the safe use and user maintenance of the appliance	N



Report No.: CTS190809039-L	Page 121 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

	- the possible reasonably foreseeable misuse and, whenever relevant, a warning against the effects it may have on the safe use of the appliance		N
	The words "Original instructions" appear on the language version(s) verified by the manufacturer or by the authorized representative		N
	When a translation of the original instructions has been provided by a person introducing the appliance on the market; the meaning of the sentence "Translation of the original instructions" appear in the relevant instructions delivered with the appliance		N
	The instructions for maintenance/service to be done by specialized personnel, mandated by the manufacturer or the authorized representative may be supplied in only one Community language which the specialized personnel understand		N
	The instructions indicate the type and frequency of inspections and maintenance required for safe operation including the preventive maintenance measures		N
7.12.ZE1	If needed for specific appliances, the following information to be given:		—
	<ul style="list-style-type: none"><li>on use, transportation, assembly, dismantling when out of service, testing or foreseeable breakdowns, if these operations have consequences on stability of the appliance in order to avoid overturning, falling or uncontrolled movements of the appliance or of its component parts</li></ul>		N
	<ul style="list-style-type: none"><li>on how to maintain adequate mechanical stability when in use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance</li></ul>		N
	<ul style="list-style-type: none"><li>on the protective measures to be taken by the user, including, where appropriate, the personal protective equipment to be provided</li></ul>		N
	<ul style="list-style-type: none"><li>on the operating method to be followed in the event of accident or breakdown; if a blockage is likely to occur the operating method to safely unblock the appliance</li></ul>		N
	<ul style="list-style-type: none"><li>on the specifications on the spare parts to be used, when these affect the health and safety of the operator</li></ul>		N



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 122 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

	<ul style="list-style-type: none"> <li>on airborne noise emissions, determined and declared in accordance with the relevant Part 2, which includes:</li> </ul>	—
	- the A-weighted emission sound pressure level at workstations, where this exceeds 70 dB(A) .....	N
	- where this level does not exceed 70 dB(A), this fact is indicated	N
	- the peak C-weighted instantaneous sound pressure value at workstations, where this exceeds 63 Pa (130 dB in relation to 20 µPa) .....	N
	- the A-weighted sound power level emitted by the machinery, where the A-weighted emission sound pressure level at workstations exceeds 80 dB(A) .....	N
7.12.ZE2	The instructions includes a warning to disconnect the appliance from its power source during service and when replacing parts	N
	If the removal of the plug is foreseen, it is clearly indicated that the removal of the plug has to be such that an operator can check from any of the points to which he has access that the plug remains removed	N
	If this is not possible, due to the construction of the appliance or its installation, a disconnection with a locking system in the isolated position is provided	N
19.11.4.8	The appliance continues to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage fluctuation occurred, or	N
	a manual operation is required to restart it	N
20.1	Appliances and their components and fittings have adequate mechanical stability during transportation, assembly, dismantling and any other action involving the appliance	N
20.2	Dangerous moving transmission parts safeguarded either by design or guards	N
	When guards are used, they are fixed guards, interlocking movable guards or protective devices	N
	Moving parts directly involved in the function of the appliance which cannot be made completely inaccessible fitted with:	—

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 123 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

	- fixed guards or interlocking movable guards preventing access to those sections of the parts that are not used in the work, and		N
	- adjustable guards restricting access to those sections of the moving parts where access is necessary		N
	Interlocking movable guards used where frequent access is required		N
21.1	Appliances and their components and fittings have adequate mechanical strength and is constructed to withstand such rough handling that may be expected in normal use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance		N
22.ZE.1	For appliances provided with a seat, the seat gives adequate stability		N
	The distance between the seat and the control devices capable of being adapted to the operator		N
22.ZE.2	For appliances provided with separate devices for the start and the stop functions, the stop function is unambiguously identifiable and does always override the start function		N
	For appliances provided with one device performing the start and the stop function, the stop function is unambiguously identifiable and does always override the start function		N
22.ZE.3	Appliances designed in such a way that incorrect mounting is avoided, if this can lead to an unsafe situation		N
	If this is not possible, information on the correct mounting is given directly on the part and/or the enclosure		N
22.ZE.4	Where the weight, size or shape prevents appliances from being moved manually, they are fitted with attachments for lifting gear, or		N
	so designed that they can be fitted with such attachments, or		N
	be shaped in such a way that standard lifting gear can easily be used		N
	Appliances to be moved manually are constructed or equipped so that they can be moved easily and safely		N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



Report No.: CTS190809039-L	Page 124 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

22.ZE.5	The fixing systems of fixed guards which prevent access to dangerous moving transmission parts only removable with the use of tools		N
	If such guards have to be removed by the user for routine cleaning or maintenance their fixing systems remain attached to the fixed guards or to the machine after removal		N
	Where possible, guards are incapable of remaining in place without their fixings		N
	This does not apply if, after removal of the screws, or if the component is incorrectly repositioned, the appliance becomes inoperative		N
	Movable guards are interlocked		N
	The interlocking devices prevent the start of hazardous appliance functions until the guards are fixed in their position, and give a stop command whenever they are no longer closed		N
	Where it is possible for an operator to reach the danger zone before the risk due to hazardous appliance functions has ceased, movable guards associated with a guard locking device in addition to an interlocking device that:		—
	- prevents the start of hazardous appliance functions until the guard is closed and locked, and		N
	- keeps the guard closed and locked until the risk of injury from the hazardous appliance functions has ceased		N
	Interlocking movable guards remain attached to the appliance when open, and		N
	they are designed and constructed in such a way that they can be adjusted only by means of an intentional action		N
22.ZE.6	Interlocking movable guards designed in such a way that the absence or failure of one of their components prevents starting or stops the hazardous appliance functions		N
	The guard is opened to the extent needed to cause the interlocking to operate and is then closed, the number of operations being defined in the specific Part 2 .....		N
	After this test any defect that may be expected in normal use is applied to the interlock system, including interruption of the supply, only one defect being simulated at a time		N
	After these tests the interlock system is fit for further use		N



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 125 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

22.ZE.7	Adjustable guards restricting access to areas of the moving parts strictly necessary for the work are:	—
	- adjustable manually or automatically, depending on the type of work involved, and	N
	- readily adjustable without the use of tools	N
22.ZE.8	In case of interruption, re-establishment after an interruption or fluctuation in whatever manner of the power supply, the appliance does not restart	N
	However, automatic restarting of the operation is allowed if the appliance may continue to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage interruption or fluctuation occurred	N
22.ZE.9	Appliances fitted with means to isolate them from all energy sources	N
	Such isolators are clearly identified, and	N
	they are capable of being locked if reconnection endanger persons	N
	After the energy source is disconnected, it is possible to dissipate any energy remaining or stored in the circuits of the appliance without risk to persons	N
		N
<b>ZF</b>	<b>ANNEX ZF (INFORMATIVE)</b> <b>CRITERIA APPLIED FOR THE ALLOCATION OF PRODUCTS COVERED BY STANDARDS IN THE EN 60335 SERIES UNDER LVD OR MD</b>	N
	List of standards under CENELEC/TC61 with the allocation under the LVD (Low Voltage Directive) or the MD (Machinery Directive).....:	N
<b>ZG</b>	<b>ANNEX ZG (NORMATIVE)</b> <b>UV APPLIANCES</b>	N
	The following modifications to this standard apply to appliances having UV emitters	N
	This annex is not applicable to appliances covered by the scopes of IEC 60335-2-27, IEC 60335-2-59 or IEC 60335-2-109	N
7.12.ZG	The instructions for appliances incorporating UVC emitters include the substance of the following: <b>WARNING — This appliance contains a UV emitter. Do not stare at the light source</b>	N

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service



# CTS

## CENTRE OF TESTING SERVICE

Report No.: CTS190809039-L	Page 126 of 126	Date: 10 September 2019
----------------------------	-----------------	-------------------------

32	For appliances incorporating UV emitters the manufacturer delivers a declaration providing evidence that the plastic material exposed to the radiation is UV resistant		N
<b>ZZ</b>	<b>ANNEX ZZ (INFORMATIVE) COVERAGE OF ESSENTIAL REQUIREMENTS OF EC DIRECTIVES</b>		N
	Description of the relation between this European standard and the LVD (Low Voltage Directive, 2006/95/EC) and the MD (Machinery Directive, 2006/42/EC)		N

Annex EN 62233:2008			
Clause	Requirement + Test	Result - Remark	Verdict
EMF- ELECTROMAGNETICS FIELDS			
	The tested product also complies with the requirements of EN 62233:2008		
	Limit .....100%	Measured max. <10%	P

### Attachments

- ☒ Photo document
- ☐ BOM
- ☒ CDF (critical data form)
- ☐ Copies of certificates of certified components
- ☐ Instruction manual
- ☐ Circuit diagram
- ☐ Explosion block
- ☐ Other if necessary

-----end of report-----

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### Centre of Testing Service

Fl.1 & 8 West, Bldg. B, No. 66, Qingyi Rd., Hi-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-87912121 (16 lines)

Fax: +86-574-87907993

Complaint line: +86-574-87908003

E-mail: cts@cts-lab.com

See Reverse For Terms And Conditions of Service

**Type Designation:**  
**Report Number:**

**RICE COOKER , EB-FD50F1**  
**CTS190809039-L**



Figure 1 (External view – total)



Figure 2 (External view –Plug with cord)



**Type Designation:**  
**Report Number:**

**RICE COOKER , EB-FD50F1**  
**CTS190809039-L**



Figure 3 (External view – controller board)



Figure 4 (External view– top)

**Type Designation:**  
**Report Number:**

**RICE COOKER , EB-FD50F1**  
**CTS190809039-L**



Figure 5 (External view– side)



Figure 6 (External view– side)

**Type Designation:** RICE COOKER , EB-FD50F1  
**Report Number:** CTS190809039-L



Figure 7 (External view– another side)



Figure 8 (External view– bottom)

**Type Designation:**  
**Report Number:**

**RICE COOKER , EB-FD50F1**  
**CTS190809039-L**



Figure 9 (External view– inlet)



Figure 10 (External view–vapor outlet)

**Type Designation:**  
**Report Number:**

**RICE COOKER , EB-FD50F1**  
**CTS190809039-L**



Figure 11 (External view– water channel)



Figure 12 (internal view– 01)

**Type Designation:**  
**Report Number:**

**RICE COOKER , EB-FD50F1**  
**CTS190809039-L**



Figure 13 (internal view- 02)



Figure 14 (internal view- 03)

**Type Designation:** RICE COOKER , EB-FD50F1  
**Report Number:** CTS190809039-L



Figure 15 (internal view- 04)

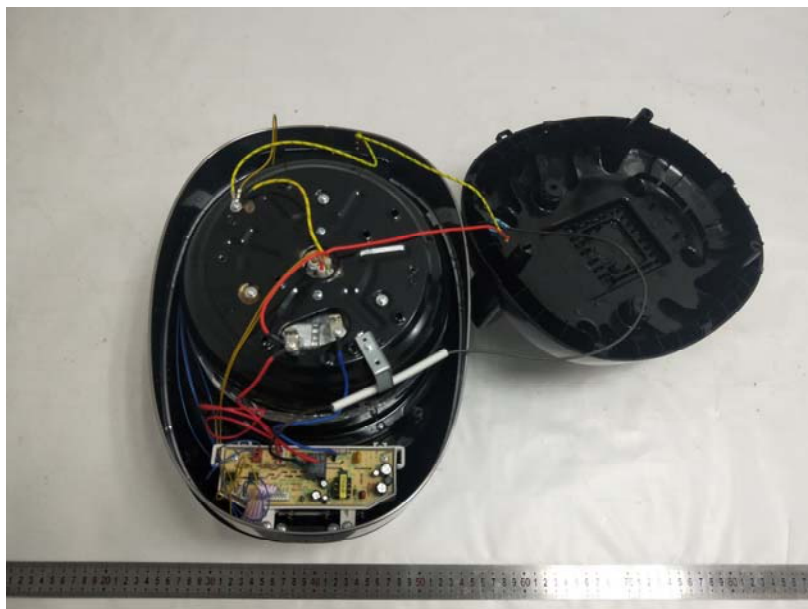


Figure 16 (internal view- 05)



**Type Designation:**  
**Report Number:**

**RICE COOKER , EB-FD50F1**  
**CTS190809039-L**

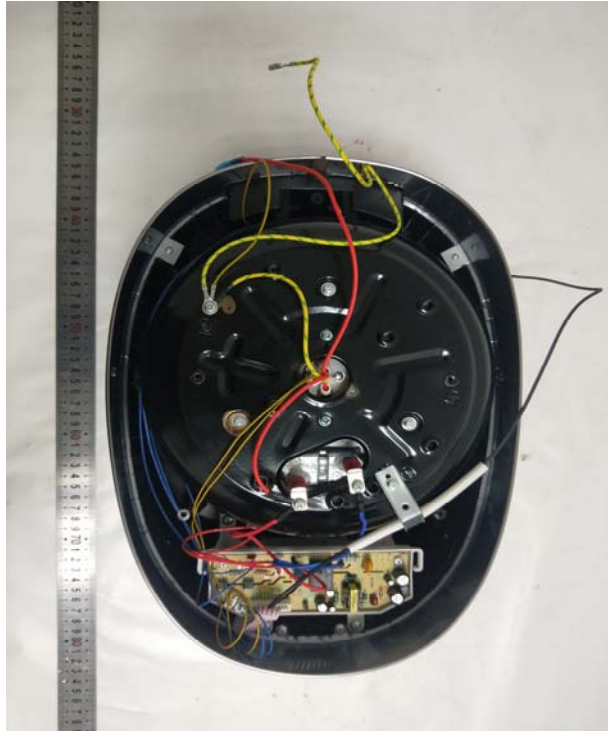


Figure 17 (internal view- 06)



Figure 18 (internal view- 07)



**Type Designation:**  
**Report Number:**

**RICE COOKER , EB-FD50F1**  
**CTS190809039-L**



Figure 19 (internal view– 08)

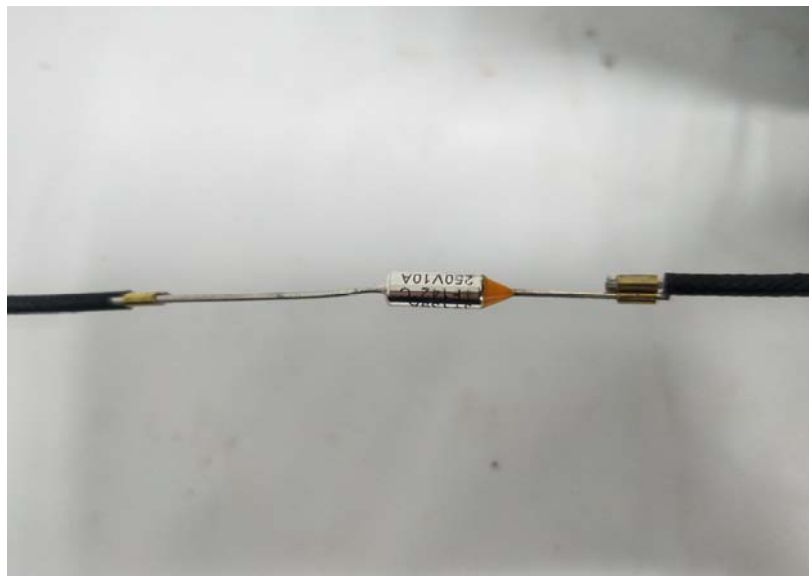


Figure 20 (internal view– 09)

Type Designation:  
Report Number:

RICE COOKER , EB-FD50F1  
CTS190809039-L

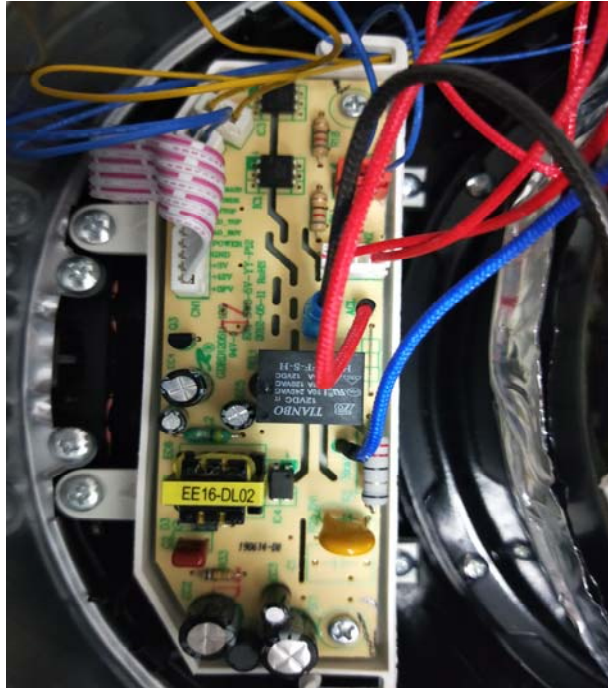


Figure 21 (internal view– 10)

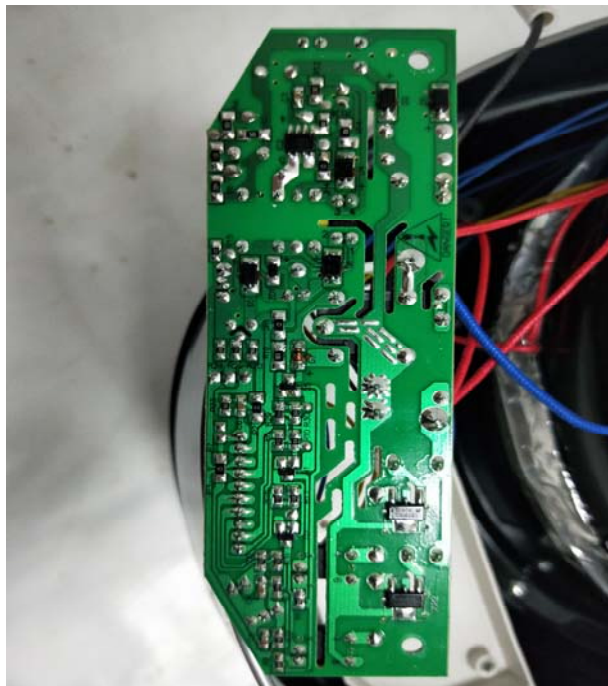


Figure 22 (internal view– 11)

**Type Designation:**  
**Report Number:**

**RICE COOKER , EB-FD50F1**  
**CTS190809039-L**



Figure 23 (internal view– 12)

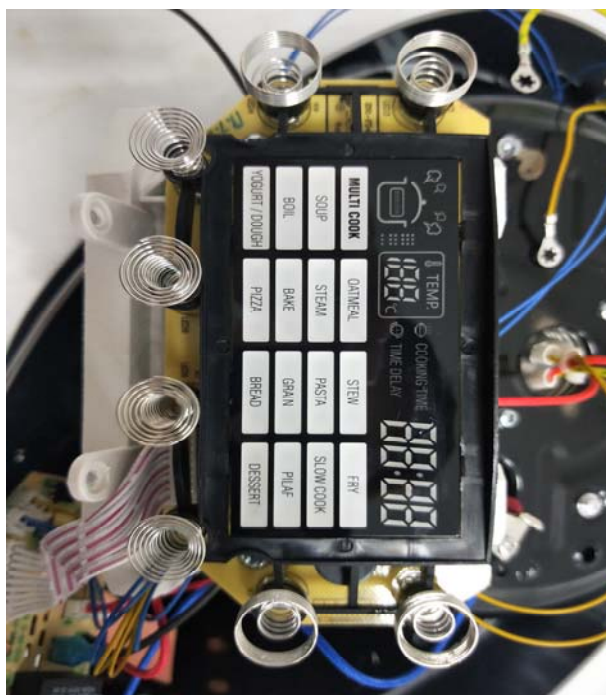


Figure 24 (internal view– 13)

**Type Designation:**  
**Report Number:**

**RICE COOKER , EB-FD50F1**  
**CTS190809039-L**



Figure 25 (internal view– 14)



Figure 26 (internal view– 15)